





1406758015503



Representative in United Kingdom
 Schneider Electric Limited
 Stafford Park 5, Telford, TF3 3BL, United Kingdom

Assemblage et encombrements
 Montage und Abmessungen

Assembly and mounting density
 Istruzioni di montaggio, dimensioni d'ingombro

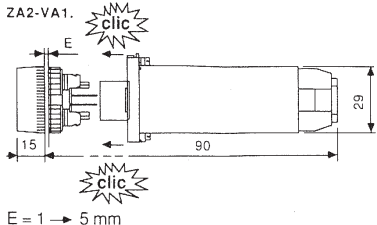


Perçage du support (Cenelec EN 50.007)

Bohrungen der Montageplatte

Panel drilling

Foratura del pannello




Changement d'une valeur affichée

Änderung des angezeigten Wertes

Loading a stored value

Variazione del dato visualizzato

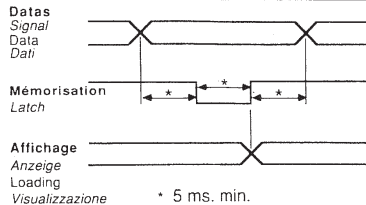


Schémas de raccordement

Anschlußpläne

Connection details

Schema dei collegamenti

ZA2-VA11(décimal + BCD)




DP = Point décimal

Decimal point

Dezimal Punkt

Punto decimale

ZA2-VA12(BCD + Latch)



Etat 0 = -30V (0 mA) ... +5V (1.4 mA)


Etat 1 = +13V (4 mA) ... +30V (9.5 mA)

Démontage

Demontage

De-mounting

Smontaggio

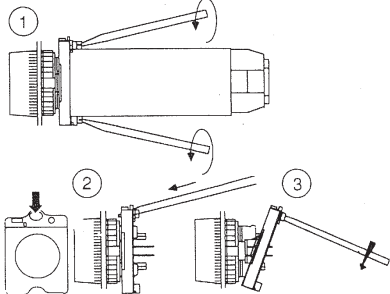

Tables d'entrées

Ansteuerung

Input tables

Tabella degli ingressi

Décimal

dezimal

Decimal

Decimale

1	2	3	4	5	6	7	8	9	Anzeige Loading Visualizzazione Affichage
0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	1
0	1	0	0	0	0	0	0	0	2
0	0	1	0	0	0	0	0	0	3
0	0	0	1	0	0	0	0	0	4
0	0	0	0	1	0	0	0	0	5
0	0	0	0	0	1	0	0	0	6
0	0	0	0	0	0	1	0	0	7
0	0	0	0	0	0	0	1	0	8
0	0	0	0	0	0	0	0	1	9

BCD

8	4	2	1	Anzeige Loading Visualizzazione Affichage	8	4	2	1	Anzeige Loading Visualizzazione Affichage
0	0	0	0	0	1	0	0	0	1
0	0	0	1	1	1	0	1	0	A
0	1	0	0	2	1	1	0	1	B
0	0	1	1	3	1	1	0	0	C
0	1	0	0	4	1	1	0	1	D
0	1	0	1	5	1	1	1	0	E
0	1	1	0	6	1	1	1	1	F
0	1	1	1	7					
1	0	0	0	8					