Product End of Life Instructions

Lexium LXM 62 power supply drive, 42 to 84A

Lexium 62 Power Supply



Potential disassembly risks

The information provided in this document assumes that the product is completely de-energized and uninstalled (refer to the instructions provided in the appropriate product manuals).

Dismantling/disassembling the product may entail hazards caused by, for example, sharp edges, chemical aggression or ejected parts.


⚠ WARNING

HAZARD DUE TO INSUFFICIENT PROTECTION

- Implement all safety measures required by the applicable regulations and by the processes used to dismantle/disassemble and dispose of the product.
- Use all necessary personal protective equipment such as gloves and goggles.

Failure to follow these instructions can result in death or serious injury.

End of Life Instructions

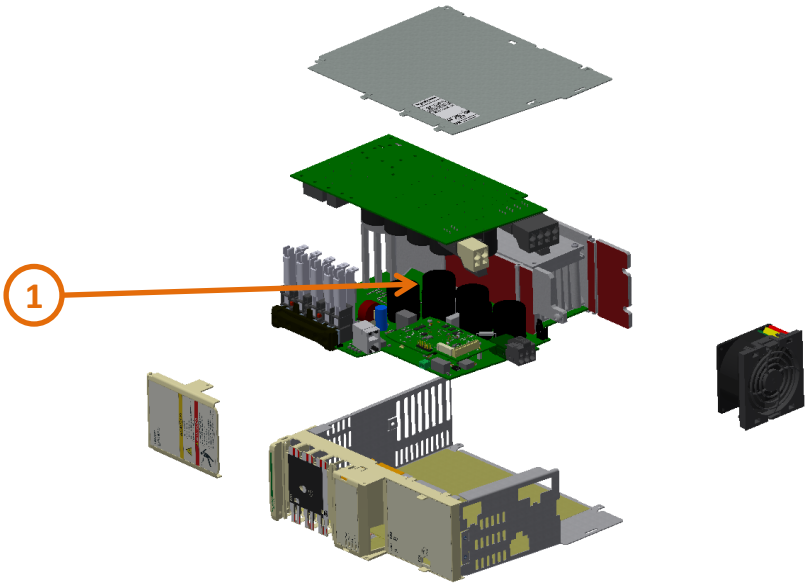

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Power) > 10cm²	1844	3 electronic cards
Other			4386	

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The modular servo drive system Lexium LXM62 is designed for the operation of servo drives in a multi-axis group. Using a common DC bus, the central power supply supplies the connected servo converters with a rated supply voltage of 400V three phase, 230V single/three phase and a rated supply current of 21A single phase, 42A three phase AC.
Product reference	LXM62PD84A11000
Total representative product mass	6.23 kg
Representative product dimensions	310mm x 89mm x 270mm
Date of information release	06-2026

Additional information

Legal information		This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	**51%**	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center
http://www.se.com/contact

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

ENVEOLI1406028_V2

© 2023 - Schneider Electric – All rights reserved

06-2026