
Product End of Life Instructions

EVlink ProAC 7.4kwT2STE6mARCDAsiMNXMID

EVlink eWallbox AC



⚠ End of Life Instructions

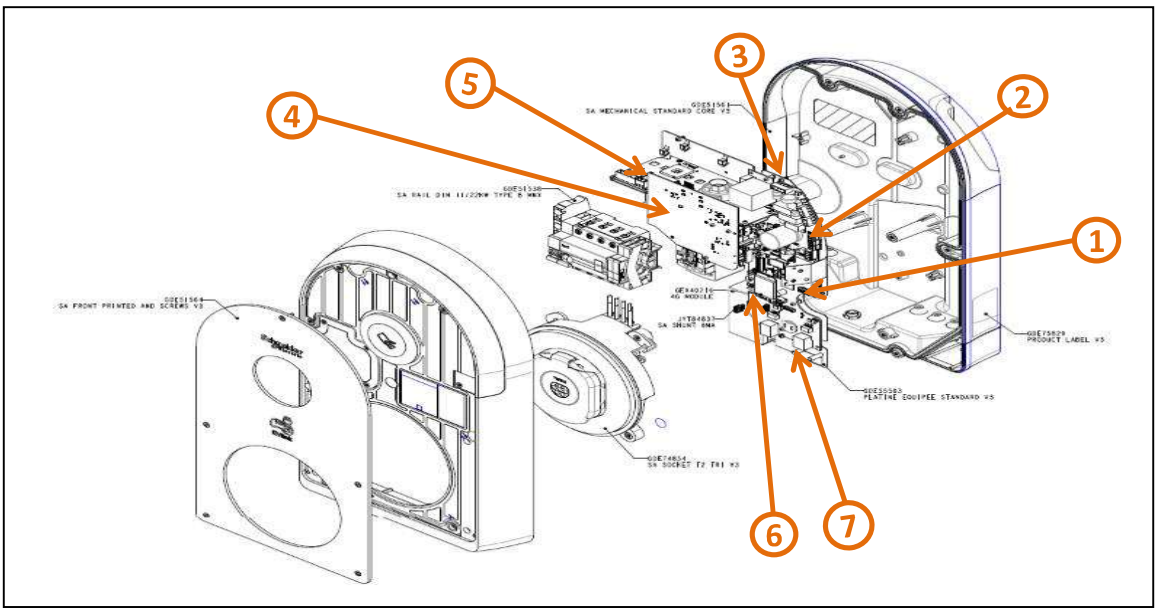

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm²	26g	PCBA including sodering parts
To be depolluted	2	Electronic Board (Power) > 10cm²	325.28g	PCBA including electrolyte capacitors
To be depolluted	3	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	25g	Aluminum electrolyte capacitors
To be depolluted	4	Electronic Board (Communication) > 10cm²	76.85g	PCBA including sodering parts
To be depolluted	5	Electronic Board (Power) > 10cm²	127.22g	PCBA including electrolyte capacitors
To be depolluted	6	Electronic Board (Communication) > 10cm²	135.95g	PCBA including sodering parts
To be depolluted	7	Other battery	26g	Coin-type Lithium Battery

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	EVlink Pro AC is designed to enable highly reliable, flexible and sustainable smart charging for multi dwelling housing and buildings. Charging mode is mode 3, Charging type is normal. It includes one RFID control system, one or two types sockets, RCD protect module and 4G communication module etc. The elements used fot connecting the station to the mains grid and to the monitoring and communication network are excluded.
Product reference	EVB3S07N4EAM
Additional similar product references	EVlink eWallbox AC
Total representative product mass	7624.582 g
Representative product dimensions	530mm x 317mm x 152mm
Accessories	Pedestal, Cable locker, TIC communication card, Metal kit
Date of information release	07-2026

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No	
Recyclability potential	**27%**	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center
http://www.se.com/contact

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com
Published by Schneider Electric
ENVEOLI2202024_V2
© 2023 - Schneider Electric – All rights reserved
07-2026