



## JAS1 JASPER

STREET LED LIGHT  
LED-STRASSENLEUCHTEN  
УЛИЧНЫЕ СВЕТИЛЬНИКИ LED  
VEŘEJNÉ OSVĚTLENÍ

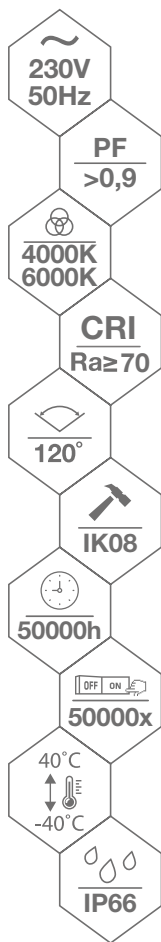


możliwość regulacji kąta pochylenia:



MATERIAL ► stop aluminium, szkło hartowane  
MATERIAL ► aluminum alloy, tempered glass  
MATERIAL ► aluminiumlegierung, gehärtetes glas  
МАТЕРИАЛ ► алюминиевый сплав, закаленное стекло  
MATERIAL ► hliník, tvrzené sklo


[mm]	a	b	c	d
JAS1-030:	506	209	144	Ø50
JAS1-050:	506	209	144	Ø50
JAS1-080:	617	259	186	Ø60
JAS1-100:	677	304	183	Ø60
JAS1-120:	677	304	183	Ø60

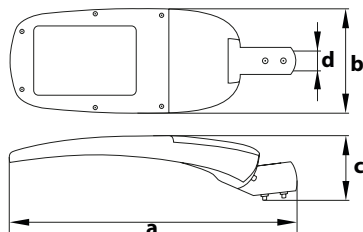

INVENTRONICS CE ENEC



diody LED PHILIPS z soczewkami



radiator odprowadzający ciepło



montaż na słupach Ø50 i Ø60



możliwość regulacji kąta pochylenia



niezawodny zasilacz INVETRONICS



adaptery dostępne na stronie 61



kod

C82-JAS1-030DG-4K  
C82-JAS1-030DG-6K  
C82-JAS1-050DG-4K  
C82-JAS1-050DG-6K  
C82-JAS1-080DG-4K  
C82-JAS1-080DG-6K  
C82-JAS1-100DG-4K  
C82-JAS1-100DG-6K  
C82-JAS1-120DG-4K  
C82-JAS1-120DG-6K



EAN

5900280929327  
5900280929341  
5900280921208  
5900280918628  
5900280929365  
5900280929389  
5900280922779  
5900280918635  
5900280921222  
5900280920706



opakowanie

1/2  
1/2  
1/2  
1/2  
1  
1  
1  
1  
1  
1



barwa światła [K]

4000  
6000  
4000  
6000  
4000  
6000  
4000  
6000  
4000  
6000

P<sub>ON</sub>

moc w trybie włączenia [W]

30  
30  
50  
50  
80  
80  
100  
100  
120  
120



strumień świetlny [lm]

3500  
3600  
5800  
6000  
9700  
10000  
12500  
13000  
14800  
15600