
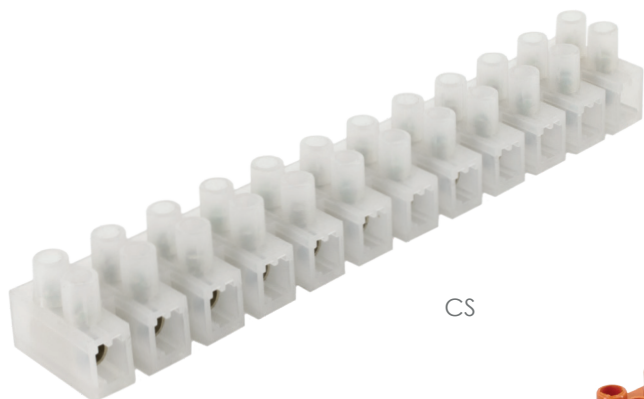


LISTWA ZACISKOWA 12-TOROWA


CONNECTOR STRIP
LÜSTERKLEMME

CS

MATERIAL ▶ PC
MATERIAL ▶ PC
MATERIAL ▶ PC



CS


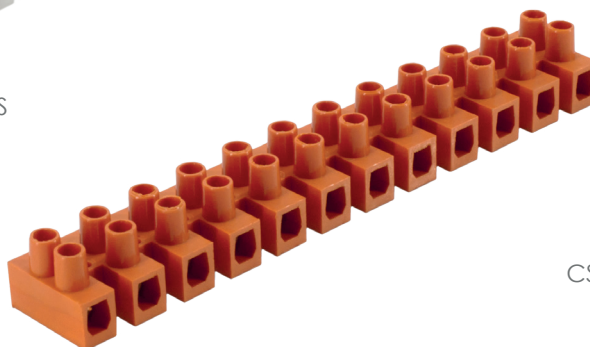


CS-PA

▶ CS

Ø	a	b	c	d	e	f
4	8	18	7	14	12	7
6	11	20	9	17	14	8
10	12	14	11	19	16	9



wartości w mm / values in mm / werte in mm



▶ CS-PA

Ø	a	b	c	d
2,5	12,2	93,5	17,8	8
4	12,2	93,5	17,8	8
6	14	116,5	20	10
10	16,3	139,5	23,4	12
16	20,9	169,5	28	14,5

wartości w mm / values in mm / werte in mm



złączki z niepalnego materiału PA66 (klasa UL94V-2)



opakowania zbiorcze po 10szt torów



łatwa separacja torów



śruby zaciskowe



kod
E05-CS025
E05-CS040
E05-CS060
E05-CS100
E05-CS160
E05-CS250
E07-CS025-PA
E07-CS040-PA
E07-CS060-PA
E07-CS100-PA
E07-CS160-PA



EAN
5908311360866
5908311360873
5908311360880
5908311360897
5908311360903
5908311360910
5900280907875
5900280907882
5900280907899
5900280907905
5900280907912



opakowanie
10/1200
10/1000
10/800
10/480
10/300
10/200
10/1000
10/1000
10/800
10/500
10/250



twardość
miękką
miękką
miękką
miękką
miękką
miękką
twardą
twardą
twardą
twardą
twardą



max. przekrój przewodu
2.5mm ²
4mm ²
6mm ²
10mm ²
16mm ²
25mm ²
2.5mm ²
4mm ²
6mm ²
10mm ²
16mm ²

I_{max}

max. obciążenie [A]
3
6
10
15
30
60
3
6
10
15
30