



## NYMPHEA BLACK & WHITE 18W plafond




CE

|                           |                       |                    |               |
|---------------------------|-----------------------|--------------------|---------------|
| Power                     | <b>18 W</b>           | Voltage            | <b>230 V</b>  |
| Luminous flux*            | <b>2000 lm (360°)</b> | Colour temperature | <b>4000 K</b> |
| Colour of light           | <b>Neutral white</b>  | Beam angle         | <b>115 °</b>  |
| Degree of protection (IP) | <b>IP54</b>           |                    |               |

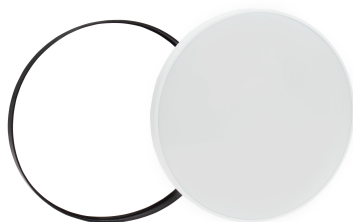


See more on dedicated page 



 User manual





 Declaration of Conformity



 Photometric file

**Technical data:**

|                              |                   |
|------------------------------|-------------------|
| Code                         | SLI031034NW_PW    |
| Power                        | 18 W              |
| Nominal current              | 125 mA            |
| Voltage                      | 230 V             |
| Energy efficiency class      | E                 |
| Energy consumption           | 18 kWh/1000h      |
| Frequency                    | 50HZ Hz           |
| Protection class             | II                |
| Power supply included        | +                 |
| Power factor                 | 0.6               |
| Useful luminous flux*        | 2000 lm (360°)    |
| Luminous flux**              | 1200 lm (360°)    |
| Lamp efficacy                | 111 lm/W          |
| Luminous intensity           | 760 cd            |
| Colour temperature           | 4000 K            |
| Colour of light              | Neutral white     |
| Beam angle                   | 115 °             |
| RA                           | >80               |
| Light source included        | +                 |
| Uniformity of color SDCM max | 5                 |
| Working temperature range    | -20 +40 °         |
| Lifespan                     | 17000 h           |
| Housing material             | TWORZYWO SZTUCZNE |
| Degree of protection (IP)    | IP54              |
| Colour                       | White             |
| Dimension (AxBxC)            | 250x52 mm         |
| Weight                       | 0.262 kg          |
| For use                      | Inside            |
| Assembly method              | On the ceiling    |
| Application                  | Inside            |
| Made in                      | PRC               |



\*applies to the LED source used. \*\*Luminaire luminous flux