



## NYPHEA CITY PRO 24W CCT plafond




Power	<b>24 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>2400 lm (120°)</b>	Colour temperature	<b>2700/4000/6000 K</b>
Colour of light	<b>CCT</b>	Beam angle	<b>120 °</b>
IK	<b>10</b>	Degree of protection (IP)	<b>IP65</b>

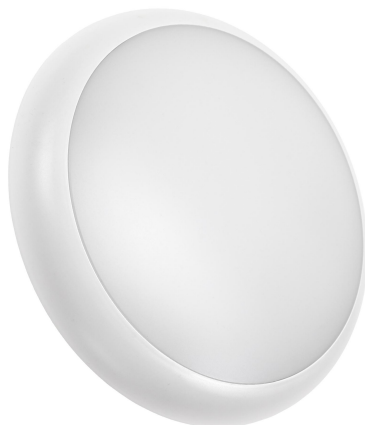

See more on dedicated page 



 User manual



 Declaration of Conformity



 Photometric file



Technical data:

Code	SLI031029CCT
Power	24 W
Nominal current	110 mA
Voltage	230 V
Energy efficiency class	F
Energy consumption	24 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.9
Useful luminous flux*	2400 lm (120°)
Luminous flux**	2400 lm (360°)
Lamp efficacy	100 lm/W
Luminous intensity	800 cd
Colour temperature	2700/4000/6000 K
Colour of light	CCT
Beam angle	120 °
RA	80
Light source included	+
Uniformity of color SDCM max	5
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	PC
IK	10
Degree of protection (IP)	IP65
Colour	White
Dimension (AxBxC)	330X79 mm
Weight	1.32 kg
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC
Other	Variable temperature. Color 2700K / 4000K / 6000K



\*applies to the LED source used. \*\*Luminaire luminous flux  
\*CCT - variable color temperature (3000K, 4000K, 6000K)