

Industrial mini Contactors CTX³ mini 3P and 4P

Cat. N°(s) : 4 170 00..01/04/06/09..11/14/16/19..21/24/26/
4 170 29..31/34/36/39..41/44/46/49..51/54/56/59..61/64/66/
4 170 69..71/74/76/79/ 4 171 40..41/44/46/49




CONTENTS	PAGES
1. Description - Use	1
2. Range	1
3. Overall dimensions	1
4. Installation - Connection	1
5. General characteristics	2
6. Conformities and approvals	5
7. Auxiliaries and accessories	5

1. DESCRIPTION - USE


. Remote control of a load by the mean of a switch.

Symbol:

. For CTX³ mini 3P.



. For CTX³ mini 4P.



Technology:

. Electromagnetic contactor.

2. RANGE

Number of Poles:

- . Triple pole (3P).
- . Four pole (4P).

Rated current I_e:

- . 6 [A], 9 [A], 12 [A] and 16 [A] AC-3 for CTX³ mini 3P.
- . 20 [A] AC-1 for CTX³ mini 4P.

Rated Voltage / Frequency:

- . 690 V, 50 / 60 [Hz].


Control voltage:

- . 24 [V~], 24 [V=], 110 [V~], 230 [V~], 415 [V~].

3. OVERALL DIMENSIONS

. CTX³ mini 3P and 4P.

- Type AC and type DC:

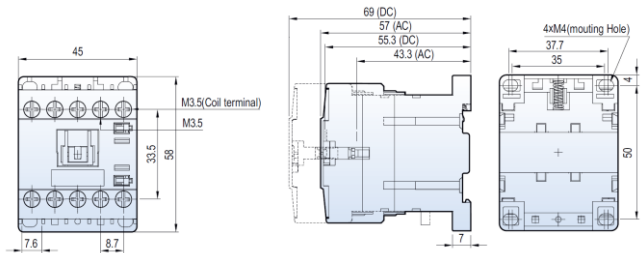


4. INSTALLATION - CONNECTION

Fixing:

. Mounting on DIN rail or plate.

Operating position:

- . ± 30 [°] possible, in relation to normal vertical mounting plane.
- . Keep the distance more than 10 [mm] front panel.

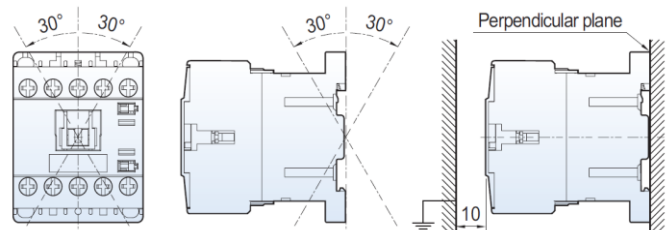

Supply:

. Either from the top or the bottom.

Size of wire connecting torque:

Screw	Wire	Torque Max
M3.5	1.25 to 2 [mm ²]	0.8 [Nm]

Industrial mini Contactors

CTX³ mini 3P and 4P

Cat. N°(s) : 4 170 00..01/04/06/09..11/14/16/19..21/24/26/
4 170 29..31/34/36/39..41/44/46/49..51/54/56/59..61/64/66/
4 170 69..71/74/76/79/ 4 171 40..41/44/46/49

5. GENERAL CHARACTERISTICS

Connection:

- . Terminals protected against direct contact (IP20).
- . Terminals with release and captive screws.
- . Screw head : slotted and pozidriv n°2.

Tools required:


- . Pozidriv N°2 screwdriver recommended.
- . Flat screwdriver Ø5 to Ø6 [mm] Maximum.

Front side:

- . By dark grey laser:
 - Brand: Legrand
 - Range: CTX mini
 - Rated current (in A)
 - Coil terminals
 - Control terminals
 - Marking power terminals (3P or 4P)
 - Marking auxiliary contact terminals (when required)

CTX³ mini Contactor : (Example of marking)

- . CTX³ mini Contactor 3P 9 [A].



Left side:

- . By identification label (referring to IEC and UL standard)

□ legrand CTX ³ mini 9A	
Uc	24VAC 24VDC 110VAC 230VAC 415V
Ue	20.4-26.4V 20.4-26.4V 83.5-121V 195.5-253V 352.8-456.5V
3P 1NO	4170 20 4170 21 4170 24 4170 26 4170 29
3P 1NC	4170 30 4170 31 4170 34 4170 36 4170 39
	V AC 120 240 1480 1600
	1PH.HP 0.5 1.5
	3PH.HP 3 5 5
	BS5424 IEC60947 VDE0660 AC V 230 400 690 AC3 kW 2.2 4 4 A 9 9 5 AC15 A 6 3 1 Continuous current: 20A When protected by 20A time delay fuses. Short circuit 5kA RMS Sym., 600V Max. AWG12-18 60/75°C-Cu wire only Torque: 7lb.in(0.8Nm) Aux. Cont. A600 G600 AC1=1th:20A Aux.HI=10A Uimp=6kV Ui=690V MADE IN KOREA 79611621122

Upper side:

- . By dark grey laser or pad printing:
 - Control voltage (Uc)

5. GENERAL CHARACTERISTICS (continued)

Rated operational voltage:

- . Ue = 690 [V] for all products.

Rated impulse voltage and rated insulation voltage:

Type of products	Rated impulse voltage (Uimp)	Rated insulation voltage (Ui)
CTX ³ mini 3P	6 [kV]	690 [V]
CTX ³ mini 4P		

Mechanical and electrical endurance:

Type of products	Mechanical endurance (in millions of operations)	Electrical endurance (in millions of operations)	Maxi operating rate in operating cycles per hour (At 440 [V~])
CTX ³ mini (3P)	12	1	1800
CTX ³ mini (4P)			

Ambient operating temperature: (standard +20°C)

- . Min. = -5°C. Max. = +40°C.

Ambient storage temperature:

- . Min. = -30°C. Max. = +65°C.

Max. temperature inside a panel:

- . +55°C.

Weight:

Type of products	AC Control	DC Control
CTX ³ mini 3P	0.17 [kg]	0.23 [kg]
CTX ³ mini 4P		

Degree of protection:

- . IP20.

Flame resistance:

- . Conforming to UL = V0.
- . Conforming to IEC 695-2-1 = 960 [°C].

Maximum operating altitude:

- . 2000 [m].

Relative humidity:

- . 45 ~ 85% RH.

Shock resistance:

- . 5 [g].

Vibration resistance:(10 - 55 [Hz])

- . 2 [g].

Industrial mini Contactors

CTX³ mini 3P and 4P

Cat. N°(s) : 4 170 00..01/04/06/09..11/14/16/19..21/24/26/
4 170 29..31/34/36/39..41/44/46/49..51/54/56/59..61/64/66/
4 170 69..71/74/76/79/ 4 171 40..41/44/46/49

5. GENERAL CHARACTERISTICS *(continued)*

Control coil characteristics:

CTX ³ mini 3P & 4P			
AC Coil			
Control voltage (Uc) 50/60 [Hz]		[V]	24, 110, 230, 415
Operating voltage	Closing	[%]	85~110
	Opening	[%]	30~40
Thermal dissipation		[W]	2
Coil consumption	inrush	[VA]	32
	Holding	[VA]	6
Operating time	Closing	[ms]	10~20
	Opening	[ms]	35~45
DC Coil			
Control voltage (Uc)		[V]	24
Operating voltage	Closing	[%]	80~125
	Opening	[%]	10~30
Coil consumption	inrush	[W]	2
	Holding	[W]	2
Operating time	Closing	[ms]	40~50
	Opening	[ms]	35~45

Lifetime of the coil supplied permanently:

. No limit.

Rated control supply voltage U_s:

. U_s = 85% - 110% U_c.

Rating: In accordance with IEC 60 947-4-1

. For Contactor CTX³ mini 3P 6 to 16 [A] & CTX³ mini 4P 20 [A]

- Rated making capacity - (440 [V~])
- Rated breaking capacity - (440 [V~])

Contactor type	CTX ³ mini 3P 6 [A]	CTX ³ mini 3P 9 [A]	CTX ³ mini 3P 12 [A]	CTX ³ mini 3P 16 [A]	CTX ³ mini 4P 20 [A]
Operation current	6 [A]	9 [A]	12 [A]	16 [A]	20 [A] (AC1)
Rated making capacity (AC-3)	72 [A]	108 [A]	144 [A]	180 [A]	180 [A]
Rated breaking capacity (AC-3)	60 [A]	90 [A]	120 [A]	150 [A]	150 [A]

Industrial mini Contactors

CTX³ mini 3P and 4P

Cat. N°(s) : 4 170 00..01/04/06/09..11/14/16/19..21/24/26/
4 170 29..31/34/36/39..41/44/46/49..51/54/56/59..61/64/66/
4 170 69..71/74/76/79/ 4 171 40..41/44/46/49

5. GENERAL CHARACTERISTICS *(continued)*

Rating: In accordance with IEC 60947-4 and UL 508 certifications - $\theta \leq 55$ [°C] *(continued)*

. For contactors CTX³ mini 3P from 6 to 16 [A].

Contactor type - (Type AC and DC)			CTX ³ mini 3P 6 [A]		CTX ³ mini 3P 9 [A]		CTX ³ mini 3P 12 [A]		CTX ³ mini 3P 16 [A]	
			[kW]	[A]	[kW]	[A]	[kW]	[A]	[kW]	[A]
AC duty	AC3	200 / 240 [V]	1.5	7	2.2	9	3	12	4	18
		380 / 440 [V]	2.2	6	4	9	5.5	12	7.5	16
		500 / 550 [V]	3	5	3.7	6	4	7	5.5	9
		690 [V]	3	4	4	5	4	5	4	5
	AC1	lth	-	20	-	20	-	20	-	20

Contactor type - (Type AC and DC)			CTX ³ mini 3P 6 [A]		CTX ³ mini 3P 9 [A]		CTX ³ mini 3P 12 [A]		CTX ³ mini 3P 16 [A]	
			[hp]	[A]	[hp]	[A]	[hp]	[A]	[hp]	[A]
UL rating (50 / 60 [Hz])	Single phase	120 [V]	1/2	-	1/2	-	1	-	-	-
		230 / 240 [V]	1	-	1.5	-	2	-	-	-
	Three phase	240 [V]	1.5	-	3	-	3	-	-	-
		480 [V]	3	-	5	-	7.5	-	-	-
		600 [V]	3	-	5	-	7.5	-	-	-
	lth		-	20	-	20	-	20	-	20

. For contactors CTX³ mini 4P 20 [A].

Contactor type - (Type AC and DC)			CTX ³ mini 4P 20 [A]	
			[kW]	[A]
AC duty	AC3	200 / 240 [V]	4	18
		380 / 440 [V]	7.5	16
		500 / 550 [V]	5.5	9
		690 [V]	4	5
	AC1	lth	-	20

Industrial mini Contactors

CTX³ mini 3P and 4P

Cat. N°(s) : 4 170 00..01/04/06/09..11/14/16/19..21/24/26/
4 170 29..31/34/36/39..41/44/46/49..51/54/56/59..61/64/66/
4 170 69..71/74/76/79/ 4 171 40..41/44/46/49

6. CONFORMITIES AND APPROVALS

Compliance to standards:


- . Reference standards: IEC/EN 60 947-4 and UL 508.
- . Certifications: CE, UL.

7. AUXILIARIES AND ACCESSORIES

Auxiliaries:

Frame size	Type	Extended amount of Auxiliary contacts
CTX ³ mini	AC	6
	DC	2

. Installation principle:

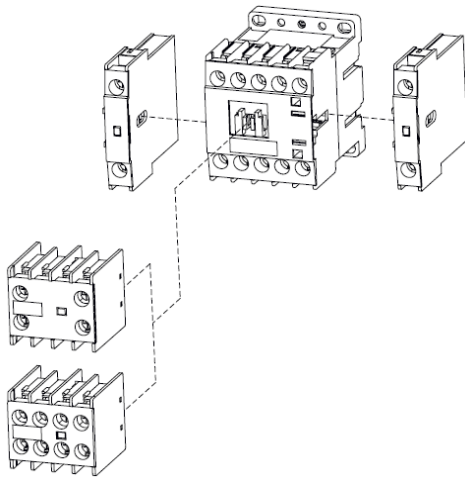

Rated operational voltage:

. U_e = 600 [V].

Rated insulation voltage:

. U_i = 690 [V].

Rated impulse voltage:

. U_{imp} = 6 [kV].

Mechanical and electrical endurance:

Type of products	Mechanical endurance (in millions of operations)	Electrical endurance (in millions of operations)
Auxiliary contacts	10	0.25

Conventional free air thermal current:

. I_{th} = 10 [A].

7. AUXILIARIES AND ACCESSORIES (continued)

Auxiliaries: (continued)

Contacts sensibility:


. DC 24 [V] - 10 [mA].

Rating: In accordance with IEC 60947-4 and UL 508 certifications

Auxiliary contacts block			
Current and Power	AC 15	120 [V]	6 [A]
		240 [V]	3 [A]
		380 [V]	1.9 [A]
		480 [V]	1.5 [A]
		500 [V]	1.4 [A]
		600 [V]	1.2 [A]
	DC 13	125 [V]	0.55 [A]
		250 [V]	0.27 [A]
		400 [V]	0.15 [A]
		500 [V]	0.13 [A]
		600 [V]	0.1 [A]


CTX³ mini auxiliary contact side: weight = 0.02 [kg]

- 1NO (cat n° 4 171 58)
- 1NC (cat n° 4 171 59)

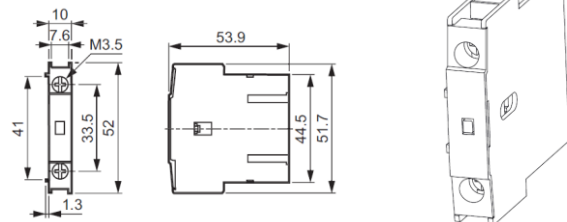

CTX³ mini auxiliary contact front: weight = 0.04 [kg]

- 4NO (cat n° 4 171 53).
- 3NO + 1NC (cat n° 4 171 54)
- 2NO + 2NC (cat n° 4 171 55)
- 1NO + 3NC (cat n° 4 171 56)
- 4NC (cat n° 4 171 57)

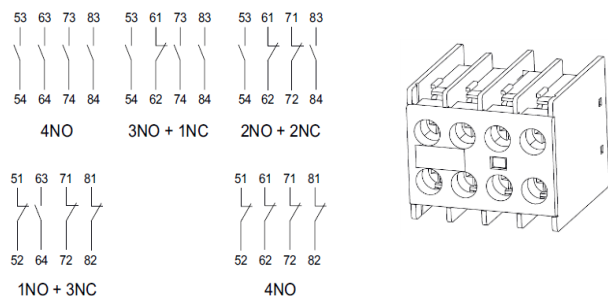

Industrial mini Contactors


CTX³ mini 3P and 4P

Cat. N°(s) : 4 170 00..01/04/06/09..11/14/16/19..21/24/26/
 4 170 29..31/34/36/39..41/44/46/49..51/54/56/59..61/64/66/
 4 170 69..71/74/76/79/ 4 171 40..41/44/46/49

7. AUXILIARIES AND ACCESSORIES (continued)




Auxiliaries: (continued)

CTX³ mini auxiliary contact front: (continued)

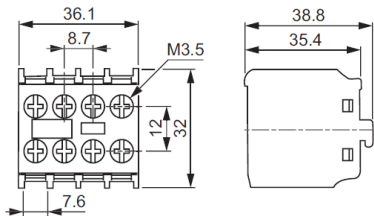

CTX³ mini auxiliary contact front: weight = 0.03 [kg]


- 1NO + 1NC (cat n° 4 171 50)
- 2NO (cat n° 4 171 51)
- 2NC (cat n° 4 171 52)

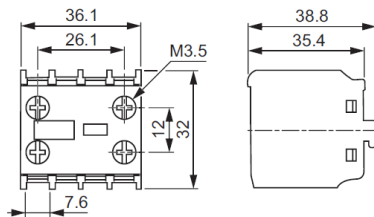

Combined devices:

. Installation principle:

- Contactor CTX³ mini with MPCB MPX³

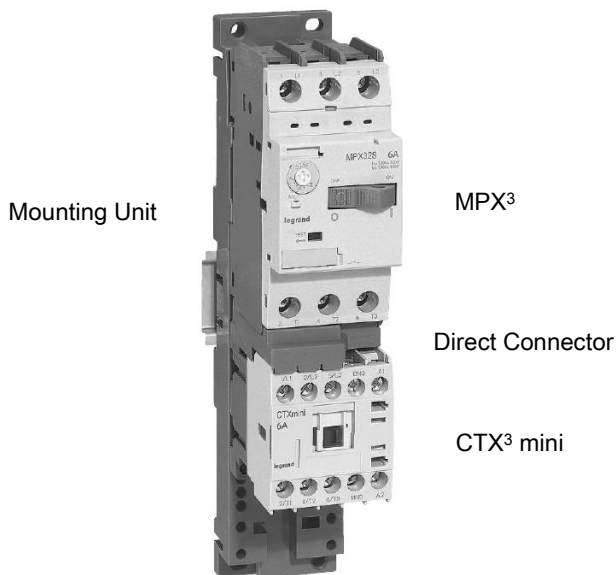

7. AUXILIARIES AND ACCESSORIES (continued)

Auxiliaries: (continued)

Combined devices: (continued)

. Installation principle:

- Contactor CTX³ mini with MPCB MPX³


Direct connector	Mounting Unit	MPX ³	CTX ³
4 174 40	Mounting Unit MPX ³ 32S / 32H / 32MA 4 174 60	MPX ³ 32S	CTX ³ mini AC
4 174 41			CTX ³ mini DC
4 174 42	4 174 60	MPX ³ 32H / 32MA	CTX ³ mini AC
4 174 43			CTX ³ mini DC

Combined devices:

. For more information, refer to the technical data sheet of RTX³ mini.

Installation principle:

- CTX³ mini with RTX³ mini

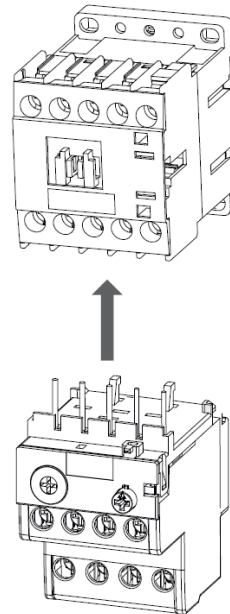

Type of products	Directly mountable Overload relay
CTX ³ mini (3P only)	RTX ³ mini

Industrial mini Contactors

CTX³ mini 3P and 4P

Cat. N°(s) : 4 170 00..01/04/06/09..11/14/16/19..21/24/26/
4 170 29..31/34/36/39..41/44/46/49..51/54/56/59..61/64/66/
4 170 69..71/74/76/79/ 4 171 40..41/44/46/49

7. AUXILIARIES AND ACCESSORIES *(continued)*

Accessories:

Interlock CTX³ mini:

- CTX³ mini mechanical Interlock (cat n° 4 171 60)



. For use with two contactors CTX³ mini. Electrical interlocking through the auxiliary contacts.

Installation software:

. XL PRO³.