



Mosaic™ Data socket faceplates

Cat. No(s): 0 786/02/04/09 - 0 786/03/10



0 786 02/04/09



0 786 03/10

1. USE


Single- and double-port data socket faceplates
 Equipped with transparent identification label holder

2. RANGE

Designation	White
Faceplate for single Keystone format	0 786 04
Faceplate for single Systimax connector	0 786 02
Faceplate for Infra+ connector	0 786 09

Designation	White
Faceplate for double Keystone format	0 786 10
Faceplate for double Systimax connector	0 786 03

3. DIMENSIONS (mm)

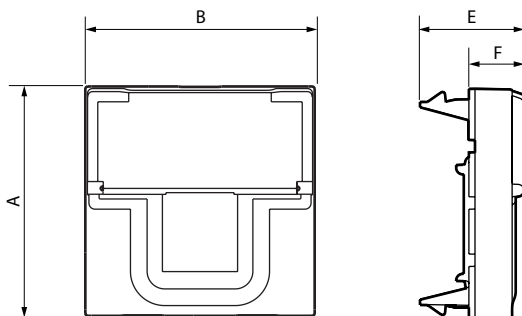

A	B	C	D
45	45	20.5	11

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact resistance: IK 03
 Penetration against solid bodies and liquids: IP 20

■ 4.2 Material characteristics

Faceplate: White PC RAL 9003
 Identification label holder made of transparent PC
 Halogen-free
 UV-resistant
 Self-extinguishing: 650°C/30 s

■ 4.3 Climate characteristics

Storage temperature: -10°C to +70°C
 Usage temperature: -5°C to +35°C

5. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
 See e. catalogue.