

0 860 13

1. USE


Control mechanisms for rolling shutters, blinds, awnings.
3 positions: up / stop / down.

2. RANGE


Description	Complete	Configurable
Roller blind switch	0 860 13	0 861 13

3. DIMENSIONS (mm)

Complete

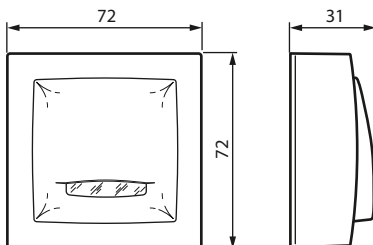

Configurable



4. CONNECTION

Type of terminals: with screws
Terminals capacity: 2 x 2.5 mm²
Option of two wires per terminal for tapping
Stripping length: 7 mm
Screwdriver: Posidrive 1, Philips 1, flat 4 mm.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 31D (complete product)
Protection against impact: IK 04

■ 5.2 Material characteristics


Plate, frame, coverplate: Plastic
Colour: White RAL 9003
UV resistant

Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: 6 AX
Maximum power on integrated ballast lamps: 100 W
Frequency: 50 Hz



■ 5.4 Climatic characteristics

Use and storage temperature: -5° C to +40° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.