



Niloé™ Step Socket outlets - French Standard


Cat. No(s): 8 631 30/31/32/33/34 - 8 633 30/31/32/33/34
 8 634 30/31/32/33/34 - 8 635 30/31/32/33/34
 8 630 30/31



8 63X 30



8 63X 32 - 8 63X 34



8 63X 31 - 8 63X 33


1. USE

Socket outlets with or without shutters.
 Mechanisms supplied with protection cover.
 To be equipped with plates one or several gangs.
 Flush-mounting or surface-mounting.
 Screw or claw fixing.

2. RANGE

Description	White	Aluminium	Grey	Black	Red
2 P+E socket screw terminal	8 631 30	8 633 30	8 634 30	8 635 30	8 630 30
2 P+E socket automatic terminal	8 631 31	8 633 31	8 634 31	8 635 31	-
2 x 2 P+E socket screw terminal	8 631 32	8 633 32	8 634 32	8 635 32	-
2 P+E socket shutters automatic terminal	8 631 33	8 633 33	8 634 33	8 635 33	-
2 x 2 P+E socket shutters screw terminal	8 631 34	8 633 34	8 634 34	8 635 34	-
2 P+E socket shutters tamperproof screw terminal	-	-	-	-	8 630 31

3. DIMENSIONS (mm)

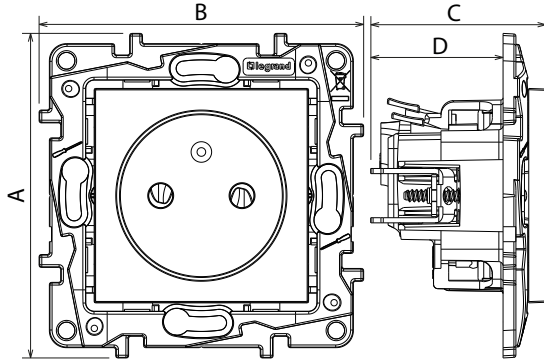

References	A	B	C	D
8 63X 30/31/33	75.8	75.8	40.8	30.8
8 630 31			41	
8 63X 32/34			57	

4. CONNECTION

References	Type of terminals	Stripping length (mm)
8 63X 30/32/34	Screw	9
8 63X 31/33	Automatic	12

Capacity: 2 x 2.5 mm²
 Flexible or rigid cables compatible

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20
 Protection against impact: IK 04

■ 5.2 Material characteristics

Material : - Mechanism housing: PC

- Halogen free

- UV resistant

- Claws: steel

Material of the support: - PC

- Halogen free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place

+ 650° C / 30 s for other parts made of insulating materials

■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 16 A

Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage and use temperature: - 5° C to + 35° C

6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 Refer to e. catalogue.