


AXOLUTE


Socket outlets

Israeli, Egypt and Swiss standards

Cat. No(s): HD4183 - HC4183 - HS4183 - HD4122ET - HC4122ET - HS4122ET
HD4164T12 - HC4164T12 - HS4164/T12 - HD4164T13 - HC4164T13 - HS4164/T13
HD4177 - HC4177 - HS4177 - HD4177V127 - HC4177/127 - HS4177/127
HD4178 - HC4178 - HS4178



HD4177










HD4164/12


1. USE

Socket outlets : different international standards.

2. RANGE

ISRAELI STANDARD		Cat. No.
	Socket 2P+E 10/16 A 250 Vac Lightable with led lamp item 11256 2 modules	<input type="checkbox"/> HD4183 <input type="checkbox"/> HC4183 <input type="checkbox"/> HS4183
EGYPT STANDARD		
	Socket 2P 10 A 250 Vac - Contact tubes Ø 4 - 4.8 mm Center line of holes 19 mm 1 module	<input type="checkbox"/> HD4122ET <input type="checkbox"/> HC4122ET <input type="checkbox"/> HS4122ET
SWISS STANDARD		
	Socket 2P+E 10 A 250 Vac 1 module	<input type="checkbox"/> HD4164T12 <input type="checkbox"/> HC4164/12 <input type="checkbox"/> HS4164/12
	Socket 2P+E 10 A 250 Vac 2 modules	<input type="checkbox"/> HD4164T13 <input type="checkbox"/> HC4164/13 <input type="checkbox"/> HS4164/13
SHAVER SOCKETS		
	Shaver socket with insulating transformer Input voltage 230 Vac 50/60 Hz Output voltage 115/230 Vac 20 VA 3 modules	<input type="checkbox"/> HD4177 <input type="checkbox"/> HC4177 <input type="checkbox"/> HS4177
	Shaver socket with insulating transformer Input voltage 127 Vac 50/60 Hz Output voltage 115/230 Vac 20 VA 3 modules	<input type="checkbox"/> HD4177V127 <input type="checkbox"/> HC4177/127 <input type="checkbox"/> HS4177/127
	Shaver socket with insulating transformer Input voltage 230 Vac 50/60 Hz Output voltage 115/230 Vac 20 VA British standard - IP24 Item conform to BS-EN61558-2-5	<input type="checkbox"/> HD4178 <input type="checkbox"/> HC4178 <input type="checkbox"/> HS4178

3. OVERALL DIMENSIONS (mm)

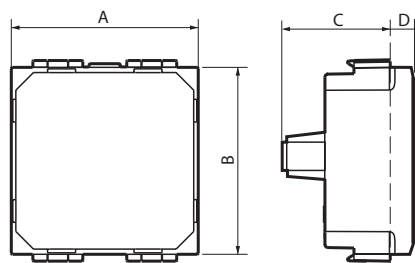

	A	B	C	D
H*4183	45	45	36	9.5
H*4122ET	22.5	45	26	9.5
H*4164T12	22.5	45	27	9.5
H*4164T13	45	45	40.5	9.5
H*4177 - H*4177/127	68	45	39.5	9.5
H*4178	140	45	41	10

*Average overall dimensions depending of the standard.

4. CONNECTION

Screw clamps:

Stripping length, rigid or flexible cables: 9 mm

Automatic clamps:

Stripping length, rigid or flexible cables: 13 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D

Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate

Colour: Anthracite, White, Tech

Halogen free.

UV resistant.

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.

+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 VAC

Current: depending of the choice of the socket

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.