



Mosaic Key operated controls

Cat. No(s): 0 770 72/73/74/75



0 770 72/73



0 770 74/75


1. USE

Control mechanism for opening and closing circuits requiring the use of a key.


2. RANGE

Description	Références
2 position key operated inverter - 6 A RONIS 601 key	0 770 72
Key operated inverter with stop position - 6 A RONIS 601 key	0 770 73
2-position key operated switch (two pole) - 10 A European barrel	0 770 74
Key operated inverter push-button with stop position - 10 A European barrel	0 770 75

5. OVERALL DIMENSIONS

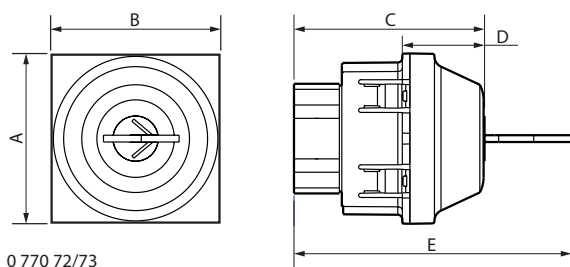

0 770 72/73

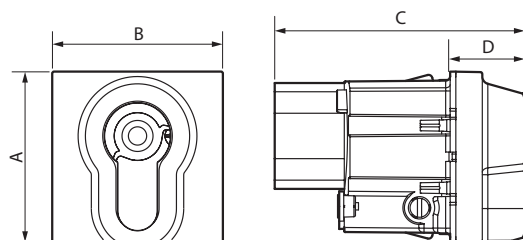


0 770 74/75

Cat. Nos	A	B	C	D	E
0 770 72/73	45	45	50.5	21.5	73.5
0 770 74/75	45	45	66	20	-


6. CONNECTION

Type of terminals: with screws
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 6 mm
 Type of screwdriver: Philips 1

Cat. No. 0 770 72



Cat. No. 0 770 74



Cat. No. 0 770 73/75



7. FUNCTION

- **Cat. No. 0 770 74:** the key is removed in central position without modifying the state of the contacts.
- **Cat. No. 0 770 75:** the key is removed in central position with the control in "OFF function".

8. TECHNICAL CHARACTERISTICS

■ 8.1 Technical characteristics

Impacts tests: IK 04

Penetration by solid/liquid bodies IP 41 (C15-100)

■ 8.2 Material characteristics

Base: Polycarbonate

Cover plate: ABS (RAL 9003)

■ 8.3 Electrical characteristics

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

Voltage: 250 V~

Current: 6 A for Cat. Nos 0 770 72/73

10 A for Cat. Nos 0 770 74/75

Frequency: 50/60 Hz

Max. power capacity: 750 W - 230 V~

48 V~ - 3 A

■ 8.4 Climate characteristics

Storage temperature: - 10°C to + 70°C

Usage temperature: - 5°C to + 40°C

9. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents:

Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product, Pre-impregnated wipes.

Resistance to the following agents: Anios, Surfanios, Bactilyline, Diluted hydrogen peroxide (35%).

Caution: Always test before using other special cleaning products

10. ACCESSORIES

Cat. No. 0 697 95: European barrel for switches 0 770 74/75 (supplied with 3 keys DIN 182 52).