


Valena Life™ Double USB socket - Type-A - 3.0 A

Cat. No(s): 7 531 12 - 7 532 12 - 7 533 12 - 7 563 12

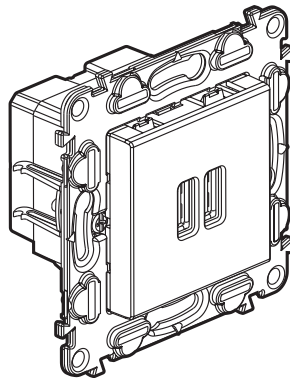

1. USE


For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, watches, loudspeakers, game consoles, powerbanks.

2. RANGE

Double USB charger 5 V $\overline{-}$ / 3.0 A (2 output Type-A)

White	Ivory	Aluminium	Black
7 531 12	7 532 12	7 533 12	7 563 12

3. OVERALL DIMENSIONS (mm)

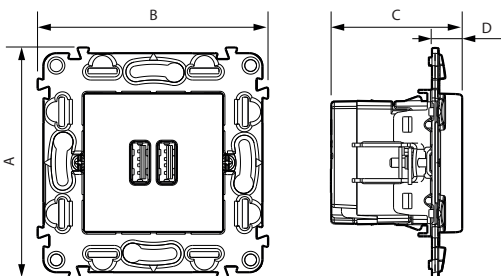


A	B	C	D
75	75	42.5	10

4. CONNECTION

Type of terminals: with screws
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 6 mm
 Screwdriver: flat 3.5 mm
 Circuit breaker: 16 A MAXI

Necessary safety precautions:



Switch OFF the power at the main circuit breaker.
 Make sure that the power is OFF before continuing with the installation.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies and liquids: IP 40

■ 5.2 Material characteristics

Colour: - White RAL 9003
 - Ivory RAL 1013
 - Painted Aluminium
 - Painted Black

Material: - Base: PC V-0 class
 - Cover plate: PC
 - Halogen-free
 - UV-resistant

Support frame: - PC grey RAL 7037
 - Halogen-free

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.
 650°C 30 s for other insulating components.

■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal input current	0.5 A
Maximum output current	3.0 A
Nominal output voltage	5.0 V $\overline{-}$
Power consumption	15.0 W
Average efficiency in active mode	84.43 %
Stand-by power consumption	< 0.07 W
Consumption class without load and average level of efficiency: Level VI*	
Protection class	II - Low voltage

*NB: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/125/EC on eco-design requirements for AC/DC power supplies.

Note : To optimize the charging time of your device, ensure turn it off during the charging phase.

■ 5.4 Climate characteristics

Storage temperature: - 20°C to + 70°C
 Operating temperature: 0°C to + 40°C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Caution: Always test before using other special cleaning products

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

Refer to e-catalogue.