



Valena Life™ - Valena Allure™ Double USB socket - Type-A - 3.0 A

Cat. no(s): 7 534 12 - 7 535 12 - 7 536 12
 7 549 95/96/97/98/99



7 534 12



7 549 95

1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.

2. RANGE


VALENA LIFE

Description	White	Ivory	Aluminium
Double USB sockets - 5 V $\overline{=}$ - 3.0 A	7 534 12	7 535 12	7 536 12

VALENA ALLURE

Description	White	Ivory	Aluminium	Black	Pearl
Double USB sockets 5 V $\overline{=}$ - 3.0 A	7 549 95	7 549 96	7 549 97	7 549 98	7 549 99

3. OVERALL DIMENSIONS (mm)

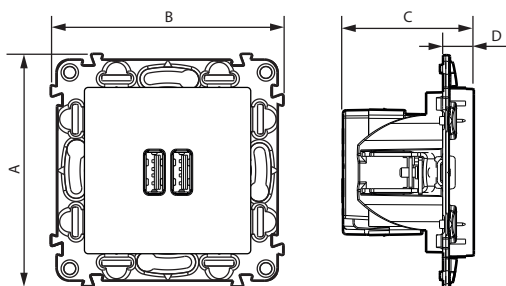

A	B	C	D
75	75	42	10

4. CONNECTION

Type of terminals: with screws
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 6 mm
 Screwdriver: flat 3.5 mm
 Circuit breaker: 16 A MAXI

Necessary safety precautions:



**Switch OFF the power at the main circuit breaker.
 Make sure that the power is OFF before continuing
 with the installation.**

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquid: IP 40

■ 5.2 Material characteristics

Polyglass appearance
 Colour : - White RAL 9003
 - Ivory RAL 1013
 Material: - Cover: PC V-0 class
 - Cover plate: ABS
 - Halogen-free
 - UV-resistant

Material of the support : - PC grey RAL 7037 + 10% glass fiber
 - Halogen-free

Self-extinguishing:
 850°C/30 s for insulating components holding live parts in place.
 650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal input current	0.5 A
Maximum output current	3.0 A
Nominal output voltage	5.0 V $\overline{=}$
Power consumption	15.0 W
Average efficiency in active mode	84.43 %
Stand-by power consumption	< 0.07 W
Consumption class without load and average level of efficiency: Level VI*	
Protection class	II - Low voltage

*NB: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

Note: To optimize the charging time of your device, ensure turn it off during the charging phase.

■ 5.4 Climate characteristics

Storage temperature: - 20°C to + 70°C
 Operating temperature: + 5°C to + 40°C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.