


Cable guide plates for Altis enclosures

Cat. No.(s): 481 50 à 481 59 - 481 60 à 481 69
481 70 à 481 79 - 481 80 à 481 89



CONTENTS

Page

1. Range	1
2. Dimensions	2
3. Installation	3

1. RANGE

Brush seal plates - IP43

Made up of two plates with brush seals

Cat. Nos	For enclosures (width mm)	For enclosures (depth mm)
481 51	600	300
481 53	800	
481 55	1000	
481 50 ⁽¹⁾	400	≥ 400
481 52 ⁽¹⁾	600	
481 54 ⁽¹⁾	800	
481 56 ⁽¹⁾	1000	

Foam seal plates - IP43

Made up of two plates with foam seals 25 x 30 mm

Cat. Nos	For enclosures (width mm)	For enclosures (depth mm)
481 61	600	300
481 63	800	
481 65	1000	
481 60 ⁽¹⁾	400	≥ 400
481 62 ⁽¹⁾	600	
481 64 ⁽¹⁾	800	
481 66 ⁽¹⁾	1000	

Cable gland plates - IP55

Cat. Nos	For enclosures (width mm)	For enclosures (depth mm)
481 68	600	300
481 78	800	
481 88	1000	
481 80 ⁽¹⁾	400	≥ 400
481 81 ⁽¹⁾	600	
481 82 ⁽¹⁾	800	
481 83 ⁽¹⁾	1000	

For 1200- or 1600-wide enclosures, two 600- or 800-wide assemblies are required respectively.

⁽¹⁾ Blanking plate to be ordered separately.

1. RANGE (continued)

Cabstop plates - IP55

Cable inlets made up of a cable gripping jaw for mechanical strength and elastomer zones providing the seal.

Fitted with Cabstop plates 364 94/95/97.

Inlet Ø 5 to 14 equivalent to ISO 16/20 and PG 9/11/13/16 cable glands.

Inlet Ø 14 to 24 equivalent to ISO 25/32 and PG 21/22 cable glands.

Can be perforated directly with the cable (no tool required).

Tight fit around the cable.

Cable can be replaced.

Supplied with sealing plugs that allow sealing of a pierced inlet while ensuring IP55, and cable disengagement tools.

Cat. Nos	For enclosures (width mm)	For enclosures (depth mm)
481 71	600	300
481 73	800	
481 75	1000	
481 70 ⁽¹⁾	400	≥ 400
481 72 ⁽¹⁾	600	
481 74 ⁽¹⁾	800	
481 76 ⁽¹⁾	1000	

Blanking plates


To be ordered separately, supplement the cable guide plates.

Cat. Nos	For enclosures		Nbr. of plates making up the assembly
	Width (mm)	Depth (mm)	
481 57	400	500	1
481 58	400	600	1
481 59	400	800	2
481 67	600	500	1
481 68	600	600	1
481 69	600	800	2
481 77	800	500	1
481 78	800	600	1
481 79	800	800	2
481 87	1000	500	1
481 88	1000	600	1
481 89	1000	800	2

Cable guide plates for Altis enclosures

Cat. No.(s): 481 50 à 481 59 - 481 60 à 481 69
481 70 à 481 79 - 481 50 à 481 89

2. DIMENSIONS (mm)



Cabstop plates used:

- Width 400, Depth 500/600/800: Cat. No. 364 94
- Width 600, Depth 300/400/500/600/800: Cat. No. 364 95
- Width 800, Depth 400/500/600/800: Cat. No. 364 97
- Width 1000, Depth 400/500/600/800: Cat. No. 364 97
- 800 x 300: 2 x Cat. No. 364 94
- 1000 x 300: 2 x Cat. No. 364 95

Enclosure dimensions Width x Depth.	With brush seal - IP 43						With foam seals - IP 43						Cabstop						For PE					
	A		B		C		A		B		C		A		B		C		A		B		C	
	L	P	L	P	L	P	L	P	L	P	L	P	L	P	L	P	L	P	L	P	L	P	L	P
600 x 300	424	89	424	89	-	-	424	100	424	100	-	-	424	200	-	-	-	-	424	200	-	-	-	-
800 x 300	624	89	624	89	-	-	624	100	624	100	-	-	624	200	-	-	-	-	624	200	-	-	-	-
1000 x 300	824	89	824	89	-	-	824	100	824	100	-	-	824	200	-	-	-	-	824	200	-	-	-	-
400 x 400	224	181	224	89	-	-	224	192	224	100	-	-	224	323	-	-	-	-	224	192	224	146	-	-
600 x 400	424	181	424	89	-	-	424	192	424	100	-	-	424	323	-	-	-	-	424	192	424	146	-	-
800 x 400	624	181	624	89	-	-	624	192	624	100	-	-	624	323	-	-	-	-	624	192	624	146	-	-
1000 x 400	824	181	824	89	-	-	824	192	824	100	-	-	824	323	-	-	-	-	824	192	824	146	-	-
400 x 500	224	181	224	89	224	100	224	192	224	100	224	100	224	323	224	100	-	-	224	192	224	146	224	100
600 x 500	424	181	424	89	424	100	424	192	424	100	424	100	424	323	424	100	-	-	424	192	424	146	424	100
800 x 500	624	181	624	89	624	100	624	192	624	100	624	100	624	323	624	100	-	-	624	192	624	146	624	100
1000 x 500	824	181	824	89	824	100	824	192	824	100	824	100	824	323	824	100	-	-	824	192	824	146	824	100
400 x 600	224	181	224	89	224	200	224	192	224	100	224	200	224	323	224	200	-	-	224	192	224	146	224	200
600 x 600	424	181	424	89	424	200	424	192	424	100	424	200	424	323	424	200	-	-	424	192	424	146	424	200
800 x 600	624	181	624	89	624	200	624	192	624	100	624	200	624	323	624	200	-	-	624	192	624	146	624	200
1000 x 600	824	181	824	89	824	200	824	192	824	100	824	200	824	323	824	200	-	-	824	192	824	146	824	200

Depth 800 mm:

- 2 plates with brushes, type C PE or foam seals are required
- 2 type B Cabstop plates are required

Possible compositions


Important : For 1200- or 1600-wide enclosures, two 600- or 800-wide assemblies are required respectively

Prof. Larg.	300	400	500	600	800
400					
600					
800	 Cable guide plate		 Cable guide plates + plugging plate		 Cable guide plates + 1 set of 2 plugging plates

Plates:
with brush seal - IP43
with foam seals - IP 43
cable gland - IP 55
Cabstop - IP 55

Blanking plate(s) to
be ordered separately

3. INSTALLATION

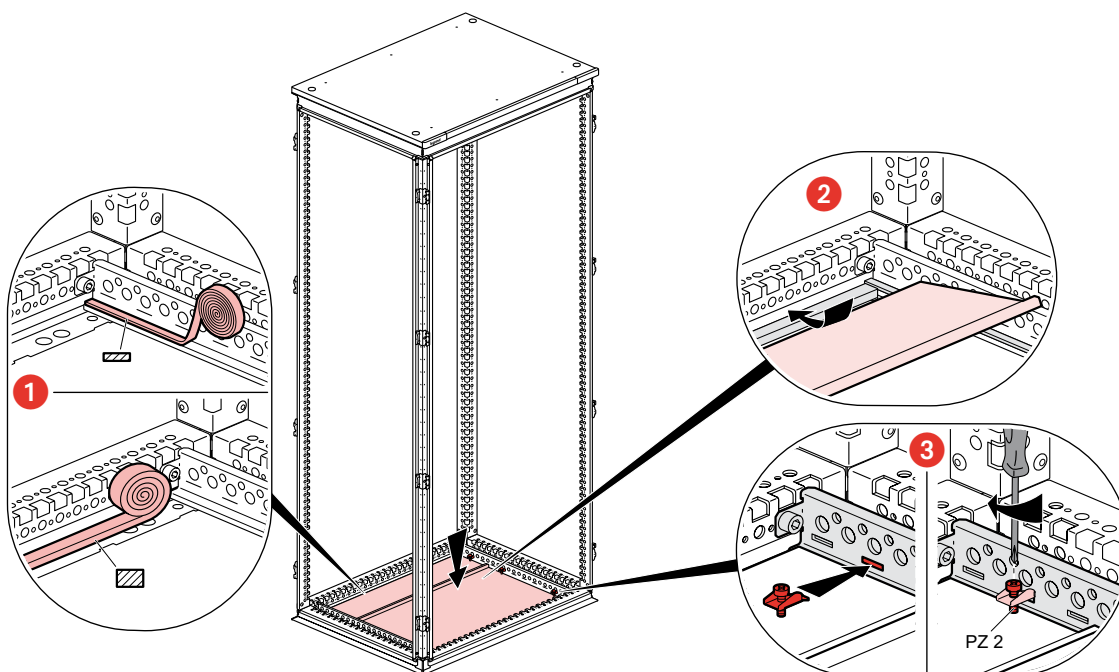

Note 1 : Seal material: EPDM

Note 2 : The equipotential connection takes place automatically by locking the plates with screws.