



Arteor™ Intermediate switches 10 AX


Cat. No(s): 5 700 08 - 5 710 08 - 5 720 08/38/39 - 5 721 65/66
5 725 08/38/39 - 5 730 63/64/67 - 5 721 63/64



5 700 08 - 5 710 08
5 720 08 - 5 725 08

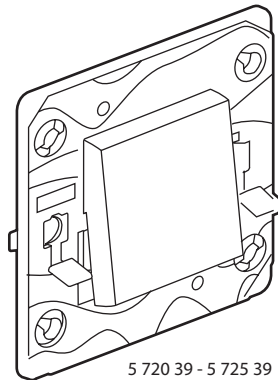

5 720 39 - 5 725 39



5 730 63 - 5 731 63/67

1. USE

Lighting controls mechanisms.


Mechanisms supplied with rocker plates. To be equipped with support frames and plates.

Except 5 720 39 - 5 725 39 - 5 730 64 - 5 731 64 for 25 mm BS box, supplied with support frames and rocker plates, to be equipped with plates.
Flush-mounting or surface-mounting.

2. RANGE

Designation	White	Magnesium	Soft Alu	Champagne
Intermediate switch (square) - 1 module	5 720 08	5 725 08	5 710 08	5 700 08
Intermediate switch (square) - 2 modules	5 720 38	5 725 38	5 721 65	5 721 66
Intermediate switch 1-gang (square) - 2 modules	5 720 39	5 725 39	-	-
Intermediate switch (round) - 2 modules	5 730 63	5 731 63	5 730 67	-
Intermediate switch 1-gang (round) - 2 modules	5 730 64	5 731 64	-	-

3. OVERALL DIMENSIONS (mm)

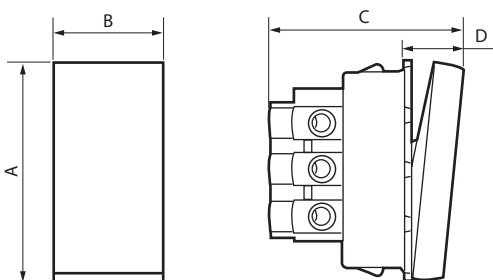

Cat. Nos	A	B	C	D
5 700 08 - 5 710 08 5 720 08 - 5 725 08	45	22.5	42	13
5 720 38 - 5 721 65/66 - 5 725 38 5 730 63/67 - 5 731 63	45	45	42	13
5 720 39 - 5 725 39 5 730 64 - 5 731 64	80	80	31	13

4. CONNECTION

Terminals: with screws

Cat. Nos	Terminals capacity			Stripping
5 700 08 - 5 710 08 5 720 08 - 5 725 08	4 x 2.5 mm ²	1 x 4 mm ²	1 x 6 mm ²	8 mm
5 720 38/39 - 5 721 65/66 5 725 38/39 - 5 730 63/64 5 731 63/64/67	2 x 2.5 mm ²	1 x 4 mm ²	-	10 mm

Screwdriver: 4 mm flat-blade up to 5.5 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20 (alone)
IP 40 (mounted)

Protection against impact: IK 04

■ 5.2 Material characteristics

Material: Rocker: PC
Mechanism casing: PC
Basket: PP

Halogen-free

UV-resistant

Self-extinguishing:

850°C/30 s for insulating parts holding live parts in place

650°C/30 s for other insulating components

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20 (alone)
IP 40 (mounted)

Protection against impact: IK 04

■ 5.2 Material characteristics

Material: Rocker: PC
Mechanism casing: PC
Basket: PP

Halogen-free
UV-resistant

Self-extinguishing:
850°C/30 s for insulating parts holding live parts in place
650°C/30 s for other insulating components

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: 10 AX
Max. power for self-ballasted lamps: 100 W
Frequency: 50/60Hz

■ 5.4 Climate characteristics

Storage temperature: - 10°C to + 70°C
Usage temperature: - 5°C to + 50°C

6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to cleaning products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Pure bleach diluted to 10%, Window-cleaning products, Pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e. catalogue.