



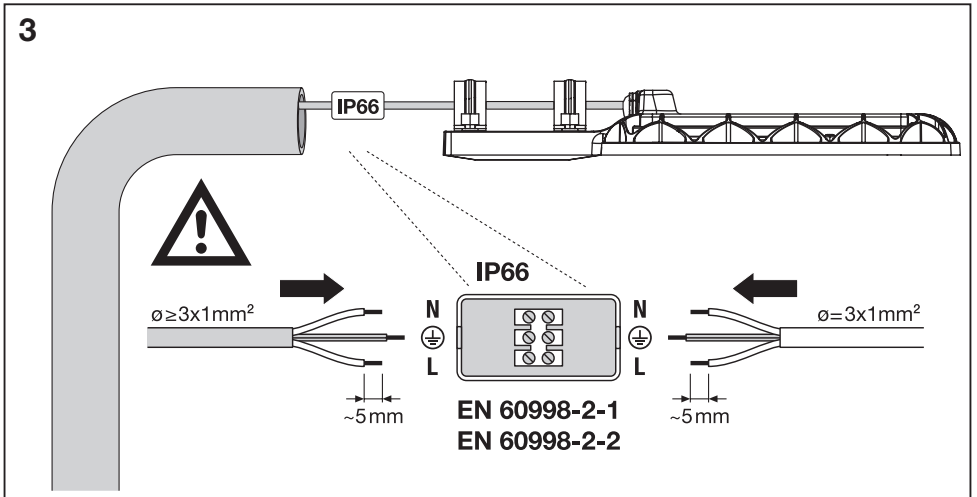
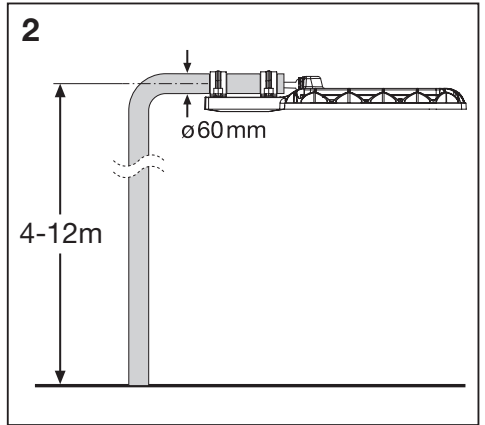
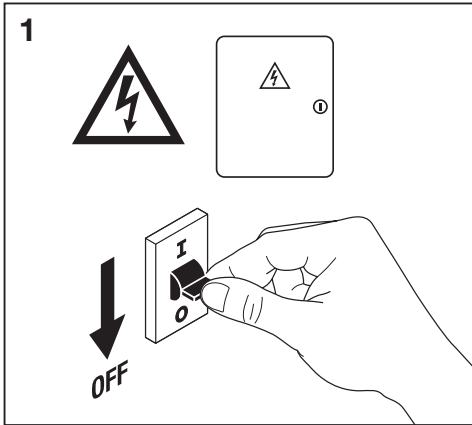
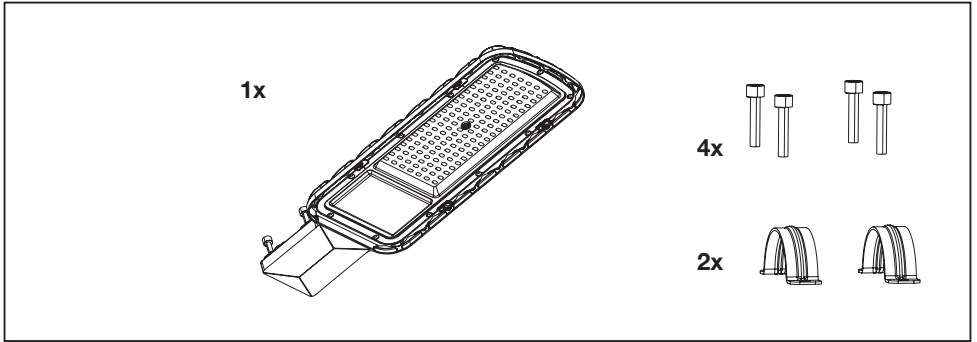
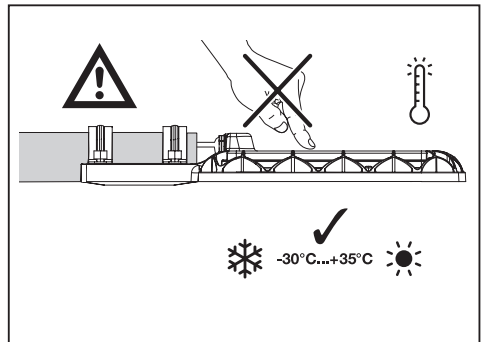
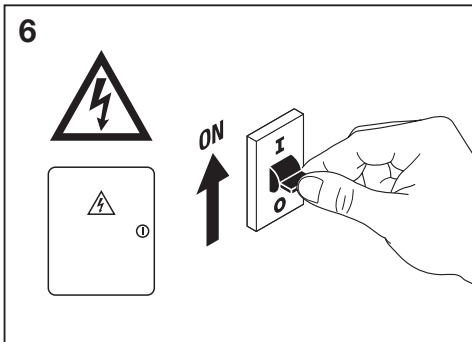
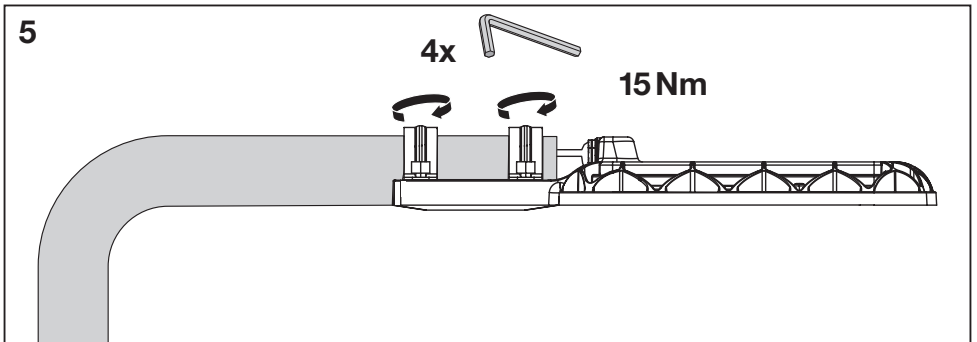
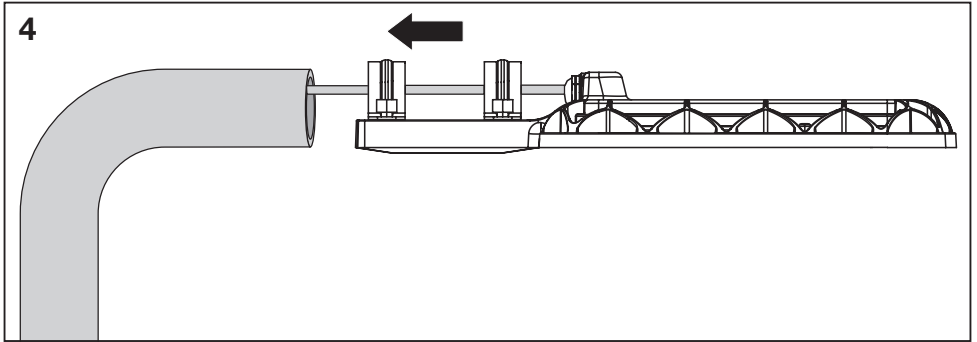

URBAN LIGHTING





	EAN	lxwxh[mm]	W	VAC	Hz	lm	lm/W	K
URBAN LITE S 30W 840 IP65 GY	4058075678019	293x126x53	30	220-240V	50/60	3450	115	4000
URBAN LITE S 30W 865 IP65 GY	4058075678033	293x126x53	30	220-240V	50/60	3450	115	6500
URBAN LITE M 50W 840 IP65 GY	4058075678071	347x136x53	50	220-240V	50/60	5400	108	4000
URBAN LITE M 50W 865 IP65 GY	4058075678095	347x136x53	50	220-240V	50/60	5400	108	6500
URBAN LITE L 100W 840 IP65 GY	4058075678156	455x170x53	100	220-240V	50/60	10500	105	4000
URBAN LITE L 100W 865 IP65 GY	4058075678194	455x170x53	100	220-240V	50/60	10500	105	6500
URBAN LITE XL 150W 840 IP65 GY	4058075678293	550x200x53	150	220-240V	50/60	16200	108	4000
URBAN LITE XL 150W 865 IP65 GY	4058075678316	550x200x53	150	220-240V	50/60	16200	108	6500

	EAN	IP	IK		 m ²	R _a	°(°C)	PF	
URBAN LITE S 30W 840 IP65 GY	4058075678019	65	07	115 ° x 70 °	0.033	>80	-30...+35	>0.90	0.6kg
URBAN LITE S 30W 865 IP65 GY	4058075678033	65	07	115 ° x 70 °	0.033	>80	-30...+35	>0.90	0.6kg
URBAN LITE M 50W 840 IP65 GY	4058075678071	65	07	140 ° x 95 °	0.042	>80	-30...+35	>0.90	0.75kg
URBAN LITE M 50W 865 IP65 GY	4058075678095	65	07	140 ° x 95 °	0.042	>80	-30...+35	>0.90	0.75kg
URBAN LITE L 100W 840 IP65 GY	4058075678156	65	07	140 ° x 95 °	0.069	>80	-30...+35	>0.90	1.2kg
URBAN LITE L 100W 865 IP65 GY	4058075678194	65	07	140 ° x 95 °	0.069	>80	-30...+35	>0.90	1.2kg
URBAN LITE XL 150W 840 IP65 GY	4058075678293	65	07	140 ° x 95 °	0.103	>80	-30...+35	>0.90	1.6kg
URBAN LITE XL 150W 865 IP65 GY	4058075678316	65	07	140 ° x 95 °	0.103	>80	-30...+35	>0.90	1.6kg

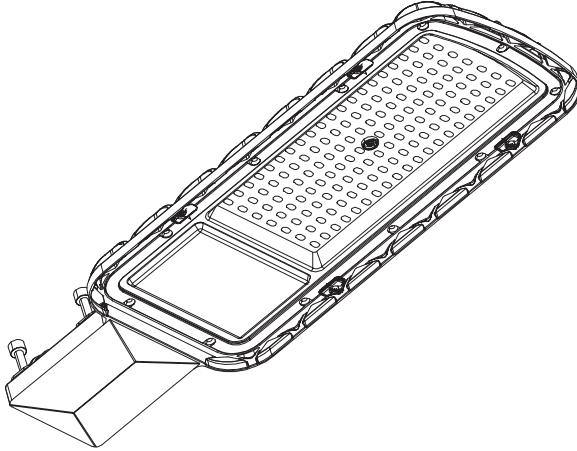



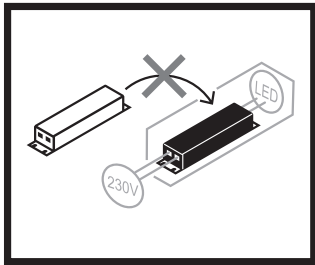

C10449057
G11135482
26.01.22



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com