



**PV 5.16 SKM10X50 CU (306 101)**


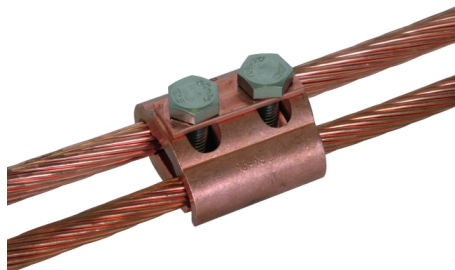


Figure without obligation



With thread in the base part and lock nut M10  
 Specified short-circuit current applies to 70 mm<sup>2</sup> Cu cable



Type	PV 5.16 SKM10X50 CU
Part No.	306 101
Material of clamp	Cu
Clamping range Rd / Rd	5-16 mm
Clamping range (stranded / cable)	16-150 mm <sup>2</sup>
Screw	M10 x 50 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Lightning current carrying capability (10/350 µs)	<sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	13.6 kA
Weight	412 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364024120
PU	25 pc(s)

<sup>\*)</sup>For exact classification, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.