


## SAK 21 AS V4A (308 406)

- System for anchor bars which is capable of carrying lightning currents
- Large-area shield support
- Compensates the yield of cable materials



Figure without obligation

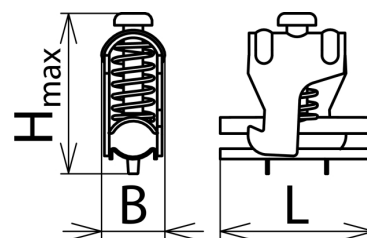

Dimension drawing SAK

Shield terminals for earthing cable shields on anchor bars. Suitable for lightning equipotential bonding. Can be subsequently installed without interrupting the cable shield or requiring tools for installation.

| Type  | SAK 21 AS V4A   |
|---|-----------------|
| Part No.  | 308 406         |
| Lightning impulse current carrying capability (10/350 μs) | 10 kA           |
| Clamping range (Rd)                                       | 17-21 mm        |
| Material  | StSt            |
| Spring pressure   | 30-63 N         |
| For mounting on   | anchor bars     |
| Dimensions (W x L x H)                                    | 29 x 40 x 59 mm |
| Weight  | 49 g            |
| Customs tariff number (Comb. Nomenclature EU)             | 85369095        |
| GTIN  | 4013364070530   |
| PU  | 10 pc(s)        |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.