




## KS 8.10 8.10 FL30 STTZN (318 251)



Figure without obligation

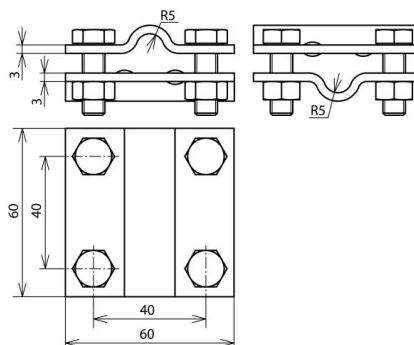

Arrangement:



Type	KS 8.10 8.10 FL30 STTZN
Part No.	318 251
Material of clamp	St/tZn
Clamping range Rd / Rd	8-10 / 8-10 mm
Clamping range Rd / FI	8-10 / 30 mm
Clamping range FI / FI	30 / 30 mm
Screw	☛ M8 x 25 mm
Material of screw / nut	St/tZn
Dimensions	60 x 60 x 3 mm
Lightning current carrying capability (10/350 μs)	<sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	14 kA
Zinc coating acc. EN 1461	~50 μm
Weight	241 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364046559
PU	25 pc(s)

<sup>\*)</sup> See test certificate for exact classification.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.