



## KS FL40 STTZN (320 044)


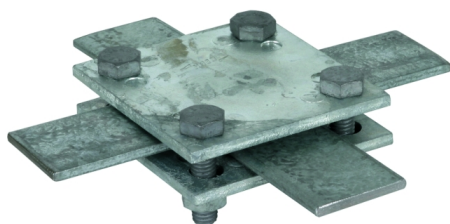


Figure without obligation



Type	KS FL40 STTZN
Part No.	320 044
Material of clamp	St/tZn
Clamping range FI / FII	30-40 / 30-40 mm
Screw	☒ M8 x 30 mm
Material of screw / nut	St/tZn
Dimensions	70 x 70 x 3 mm
Lightning current carrying capability (10/350 μs)	☒ 100 kA <sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	12.6 kA
Zinc coating acc. EN 1461	~50 μm
Weight	301 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364021501
PU	25 pc(s)

<sup>\*)</sup> See test certificate for exact classification.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.