

AL2 10DA LSA (907 997)

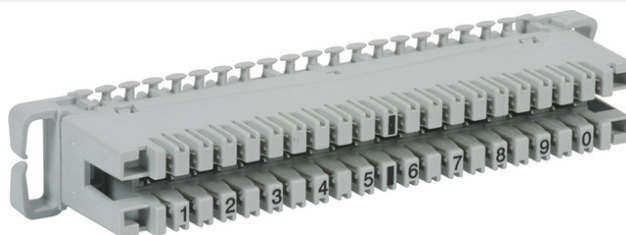


Figure without obligation

Series 2 for LSA technology for inseparably connecting 10 pairs each on the cable and routing side. Accomodates DPL 10 G3 arresters. Parallel protective circuit only.

Type	AL2 10DA LSA
Part No.	907 997
Enclosure material	PBT
Test standards	DIN 47608-1, -2
Diameter of solid conductors	0.40-0.80 mm
Conductor diameter with insulation	0.70-1.50 mm
Contacting frequency for conductor diameters ≤ 0.65 mm	> 50 x
Contacting frequency for conductor diameters of 0.8 mm	≤ 50 x
Contact material	special brass
Contact surface	silver
Flame protection	UL 94 V-0
Insulation resistance	5x 10,000 Mohms
Volume resistance of IPC terminal	< 10 mohms
Electric strength	2 kV / 50 Hz
Weight	48 g
Customs tariff number (Comb. Nomenclature EU)	85369010
GTIN	4013364033542
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.