


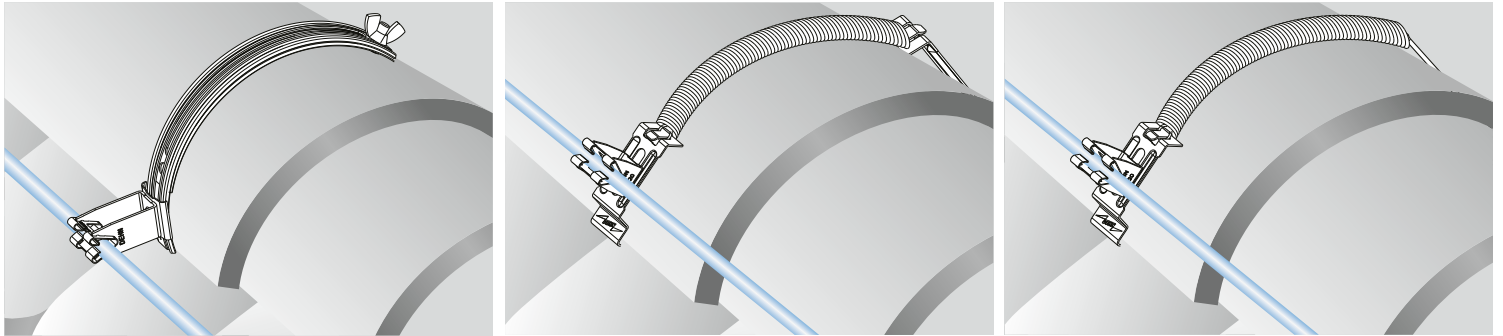


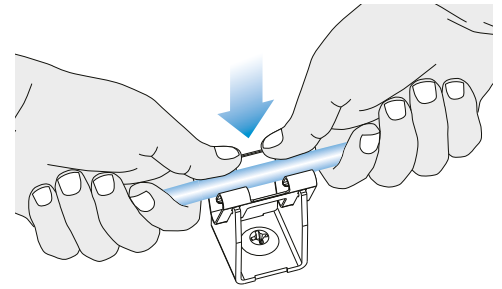


IEC 60417-6182:  
Installation,  
electrotechnical expertise

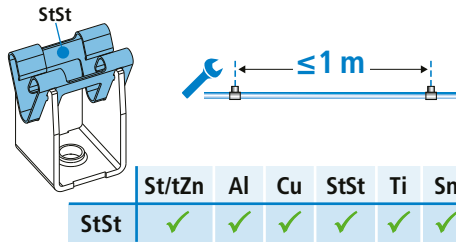

IEC 60417-6183:  
Installation,  
mechanical expertise




- 206 109 20 mm / 23 mm / StSt
- 206 809 20 mm / 15 mm / StSt
- 206 807 20 mm / 15 mm / StSt/Cu
- 206 819 32 mm / 15 mm / StSt
- 206 817 32 mm / 15 mm / StSt/Cu

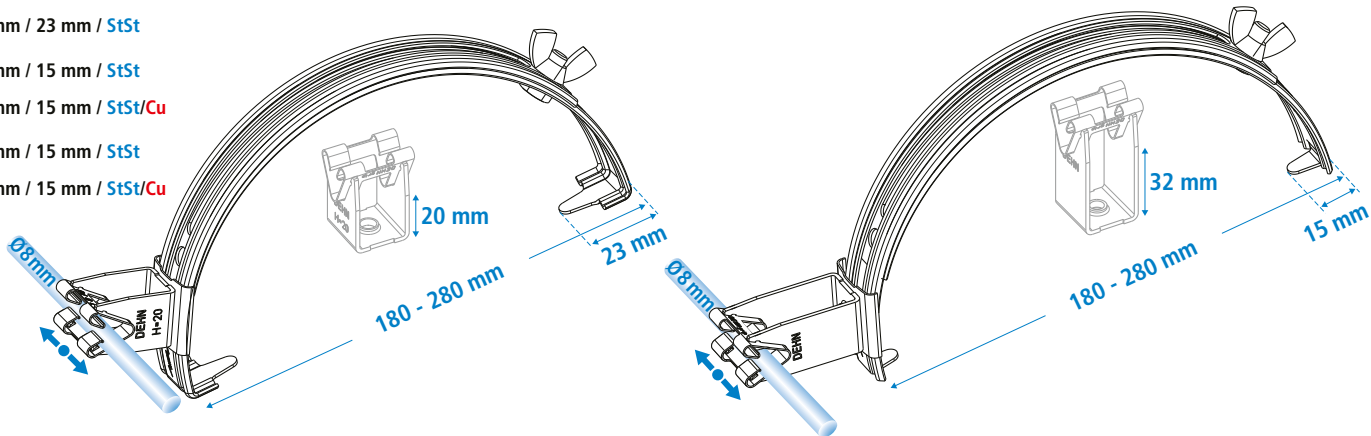


### DEHNgrip

- 206 239 20 mm / StSt
- 206 237 20 mm / StSt/Cu
- 206 249 32 mm / StSt
- 206 247 32 mm / StSt/Cu

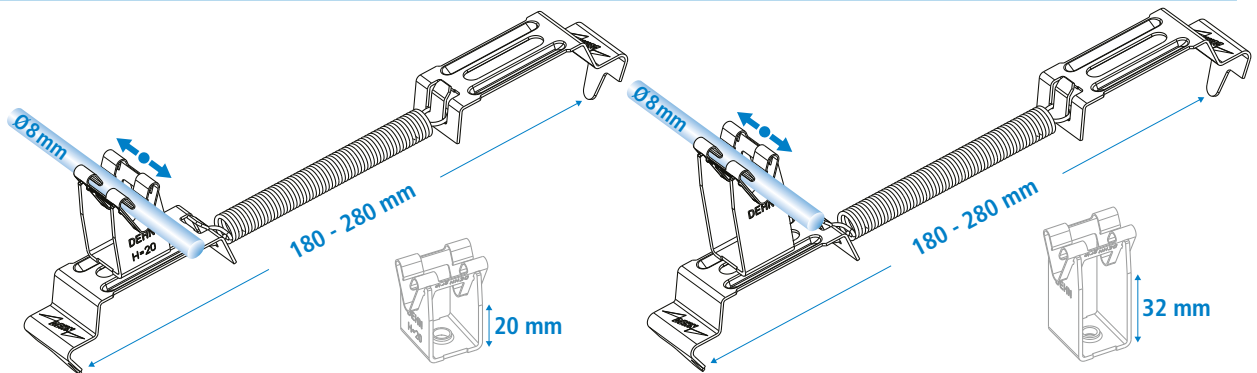

### SPANNgrip

- 206 439 20 mm / StSt
- 206 449 32 mm / StSt

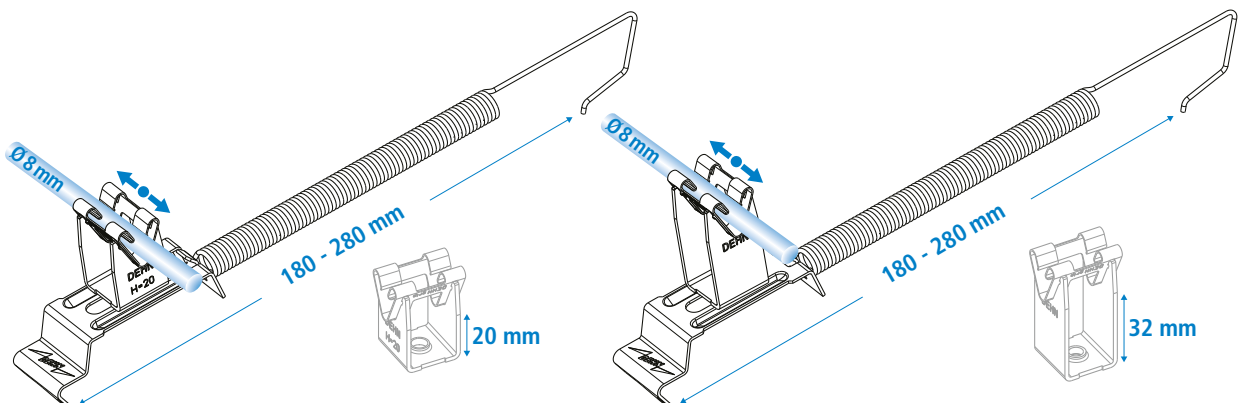

### SPANNgrip light

Surge Protection  
Lightning Protection / Earthing  
Safety Equipment  
DEHN protects.

DEHN SE

Hans-Dehn-Str. 1  
92318 Neumarkt  
Germany

Tel. +49 9181 906-0  
www.dehn-international.com



IEC 60417-6182:  
Installation,  
electrotechnical expertise



IEC 60417-6183:  
Installation,  
mechanical expertise

DIN EN 62561-4



250 mm

max. 200 N

Plastic

≤ 1 m

	St/tZn	Al	Cu	StSt	Ti	Sn
Plastic	✓	✓	✓	✓	✓	✓

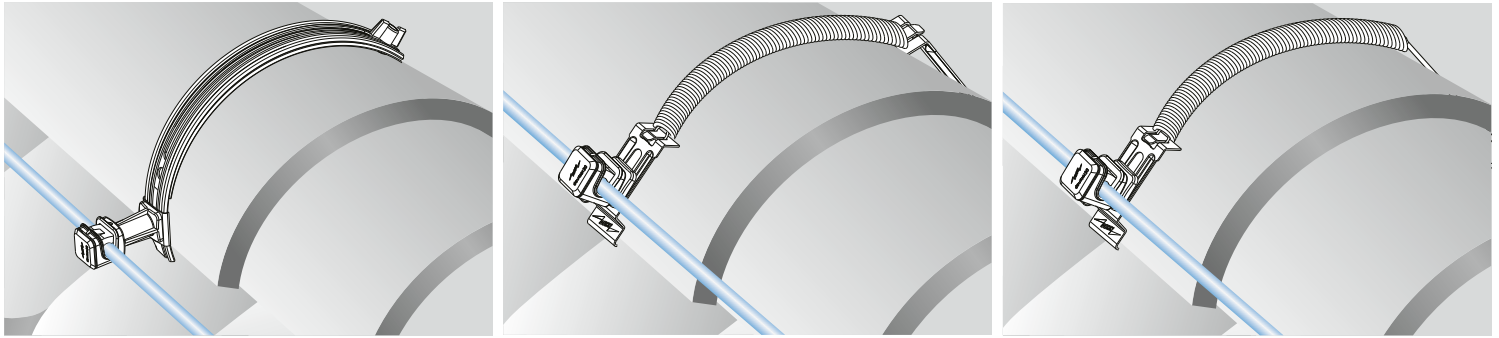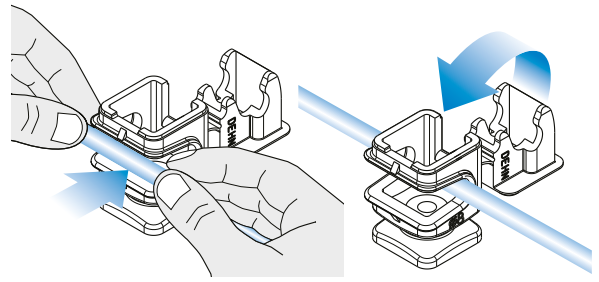

- 204 109 16 mm / StSt
- 204 911 16 mm / StSt
- 204 107 16 mm / Cu
- 204 129 36 mm / StSt
- 204 913 36 mm / StSt
- 204 127 36 mm / Cu

### DEHNsnap

- 204 269 16 mm / StSt
- 204 267 16 mm / Cu

- 204 249 36 mm / StSt
- 204 247 36 mm / Cu

### SPANNsnap

- 204 469 16 mm / StSt
- 204 449 36 mm / StSt

### SPANNsnap light