
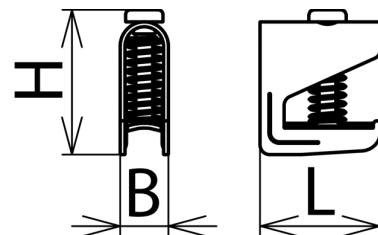


## SAK 6.5 SN MS (919 010)

- Lightning current carrying system for busbars
- Large-area shield contact
- Compensates the yield of cable materials



Figure without obligation



Dimension drawing SAK

Shield terminals for earthing cable shields on busbars (18x3). Suitable for lightning equipotential bonding. Can be subsequently installed without interrupting the cable shield or requiring tools for installation.

Type	SAK 6.5 SN MS
Part No.	919 010
Lightning impulse current carrying capability (10/350 μs)	5 kA
Clamping range (Rd)	1.5-6.5 mm
Material	nickel-plated brass
Spring pressure	8-13 N
For mounting on	SN 18x3 CU 1000
Dimensions (W x L x H)	10 x 25 x 40 mm
Weight	13 g
Customs tariff number (Comb. Nomenclature EU)	85369095
GTIN	4013364071612
PU	10 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.