



**UTK 8.10 FL30 V2A (459 039)**


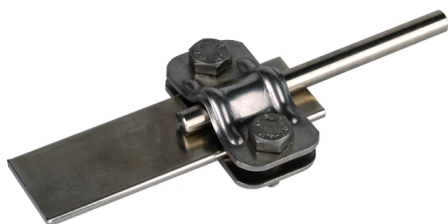


Figure without obligation



Arrangement:

Type	UTK 8.10 FL30 V2A
Part No.	459 039
Material	StSt
Clamping range Rd / FI	8-10 / 30 mm
Clamping range FI / FI	30 / 30 mm
Screw	⚙ M8 x 20 mm
Material of screw	StSt
Distance between screws	40 mm
Material thickness (t1)	2.5 mm
Lightning current carrying capability (10/350 μs)	100 kA /  50 kA *)
Standard	EN 62561-1
Weight	88 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364047594
PU	50 pc(s)

\*)For exact classification, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.