


## POP 4 255 C25 (900 765)


- Effective power frequency overvoltage protection
- Compact design allows easy retrofitting
- Compliance with EN 5055



Figure without obligation



Basic circuit diagram POP 4 255 C25

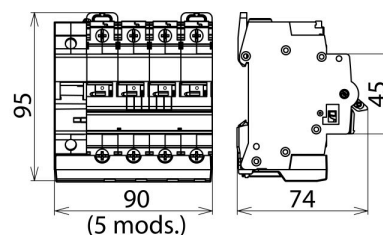

Dimension drawing POP 4 255 C25

### General

Type	POP 4 255 C25
Part No.	900 765
Power supply system	three-phase TT / TN system
Number of poles	3P + N
Nominal a.c. voltage (U <sub>N</sub> )	230 / 400 V
Nominal frequency (f <sub>N</sub> )	50 Hz
Operating temperature range (T <sub>U</sub> )	-25°C to +60°C
Cross-sectional area (L1, L2, L3, N) (min.)	2.5 mm <sup>2</sup> solid / fine-stranded
Cross-sectional area (L1, L2, L3, N) (max.)	16 mm <sup>2</sup> fine-stranded / 25 mm <sup>2</sup> solid
Degree of protection protection	IP 20
Capacity	5 module(s), DIN 43880
Mounting	35 mm DIN rails acc. to EN 60715

### POP

Type	POP 4 255 C25
Part No.	900 765
Tested to	EN 50550
Max. non-tripping voltage (a.c.)	255 V
Max. tripping voltage (a.c.)	415 V
Tripping time at 275 V a.c.	8 s
Tripping time at 400 V a.c.	120 ms
Max. current at 275 V a.c.	0.4 A
Max. current at 400 V a.c.	0.6 A
Power consumption	0.7 VA
Trip indicator	red

### MCB

Type	POP 4 255 C25
Part No.	900 765
Tripping characteristic	C
Nominal alternating current (I <sub>n</sub> )	25 A
Rated switching capacity (I <sub>cn</sub> ) acc. to EN 60898	6 kA
Weight	512 g
Customs tariff number (Comb. Nomenclature EU)	85363030
GTIN	4013364156166
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.