


## FM D30 L2300 DBS R320 GFK AL STTZN (819 282)



Figure without obligation

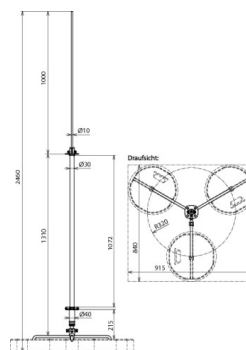

Type	FM D30 L2300 DBS R320 GFK AL STTZN
Part No.	819 282
Height	2300 mm
Material of tripod	St/tZn
Space required for tripod	850 x 930 mm
Radius of tripod	320 mm
Number of bases	3
Material of supporting tube	GRP / Al
Length of supporting tube	1300 mm
Insulating clearance	1095 mm
Diameter Ø outside	30 mm
Length of air-termination tip	1000 mm
Material of air-termination tip	StSt
Max. gust wind speed for 3 bases, 17 kg each, 2x HVI light outside	149 km/h
Pull-out force with a length of 500#mm	200 N (supporting tube insulator as per 62561-8)
Bending force with a length of 500#mm	200 N (supporting tube insulator as per 62561-8)
Standard	DIN IEC/TS 62561-8 (VDE V 0185-561-8)
Weight	4,6 kg
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364252073
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.