

DMI 21 10 1 N (990 107)

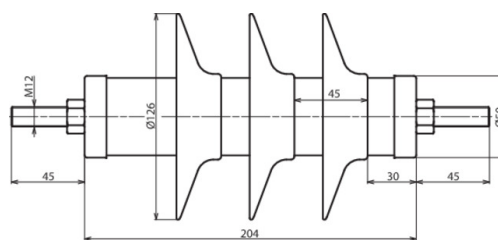


Figure without obligation

Dimension drawing DMI 21 10 1 N

Type	DMI 21 10 1 N
Part No.	990 107
Nominal discharge current (8/20 μs) (I _n)	10 kA
High current impulse (4/10 μs)	100 kA
Overload capacity	20 kA
Line discharge class (1)	1 (2.8 kJ/kV U _{lr})
Long-duration current impulse (1)	250 A / 2000 μs
Rated voltage (a.c.) (U _r)	21 kV
Continuous operating voltage (a.c.) (MCOV) (U _c)	16.8 kV
Temporary overvoltage (TOV) at 1 sec. (U _{1s})	24.2 kV
Temporary overvoltage (TOV) at 10 sec. (U _{10s})	22.9 kV
Residual voltage at 10 kA (1/2 μs) (Ū _{res})	62.1 kV
Residual voltage at 5 kA (8/20 μs) (Ū _{res})	53.9 kV
Residual voltage at 10 kA (8/20 μs) (Ū _{res})	58.0 kV
Residual voltage at 20 kA (8/20 μs) (Ū _{res})	64.4 kV
Residual voltage at 40 kA (8/20 μs) (Ū _{res})	72.5 kV
Residual voltage at 125 A (40/100 μs) (Ū _{res})	42.3 kV
Residual voltage at 250 A (40/100 μs) (Ū _{res})	43.7 kV
Residual voltage at 500 A (40/100 μs) (Ū _{res})	45.2 kV
Residual voltage at 1000 A (40/100 μs) (Ū _{res})	47.0 kV
Residual voltage at 2000 A (40/100 μs) (Ū _{res})	49.3 kV
Insulation of arrester housing / nominal power frequency withstand voltage (dry) (U _{PFWL})	70 kV
Insulation of arrester housing / nominal power frequency withstand voltage (wet) (U _{PFWL})	46 kV
Insulation of arrester housing / nominal lightning withstand voltage (U _{LWL})	104 kV
Height (h)	204 mm
Number of shields	3
Creepage distance (+/- 5%)	405 mm
Torsional strength	78 Nm
Maximum permissible dynamic service load (MPDSL)	230 Nm
Tensile strength	1400 N
Ambient temperature (T _a)	-40 °C ... +55 °C
Altitude	up to 1000 m above sea level
Power frequency (f _N)	16-62 Hz
Housing material	HTV silicone housing
Colour	auburn, RAL 3013
Fittings	terminals, screws and nuts of stainless steel
Conductor clamp	up to Ø16 mm
Test standards	IEC 60099-4
Weight	1,7 kg
Customs tariff number (Comb. Nomenclature EU)	85354000
GTIN	4013364102828
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.