


SCS 36 2000 (763 612)

- For use as operating stick for inserting insulating protective shutters
- Handle termination with end cap

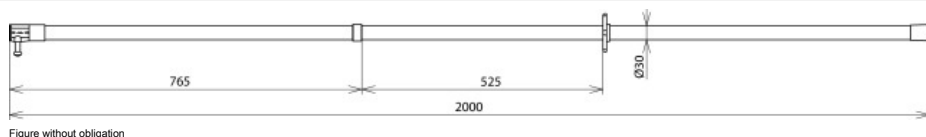

| Type | SCS 36 2000 |
|--|---|
| Part No. | 763 612 |
| Nominal voltage (U _N) | 1 ... 36 kV |
| Max. load on the operating head | 7.5 kg |
| Total length (l _G) | 2000 mm |
| Insulating clearance (l _I) | 525 mm |
| Length (handle) (l _H) | 700 mm |
| Insertion depth (l _O) | 765 mm |
| Standard (switching stick head) | DIN VDE V 0681-2 |
| Standard (switching stick) | DIN VDE V 0681-1 and -2 |
| Standard (insulating stick) | DIN VDE V 0681-1 |
| For use at | * |
| For | For indoor and outdoor installations |
| Design | Fully insulated, solid switching stick head |
| Material (insulating tube) | Glass-fibre reinforced polyester tube |
| Material (switching pin) | Steel, plastic-sheathed |
| Diameter | 30 mm |
| Anti-rotation plug-in coupling including end fitting | No |
| Type of device | Switching stick |
| Weight | 800 g |
| Customs tariff number (Comb. Nomenclature EU) | 82055980 |
| GTIN | 4013364078635 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.