



PAS AH RK 7X25 2X8.10 1XFL40 (563 040)


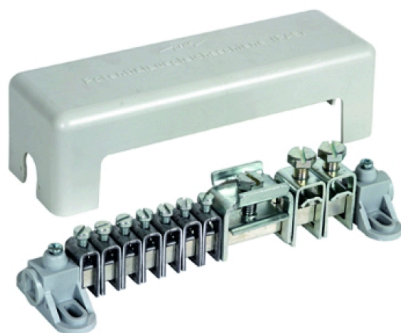


Figure without obligation

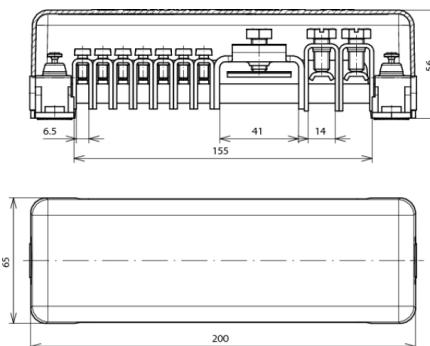

Arrangement:

Type	PAS AH RK 7X25 2X8.10 1XFL40
Part No.	563 040
Connection (solid / stranded)	7x 2.5-25 mm ²
Connection Rd (solid / stranded / cable)	2x 8-10 mm or 16-95 mm ²
Connection FI	1x -40 x 5 mm
Clamping bar	brass/gal Sn
Cross section	100 mm ²
Fixing	[4x] 6 x 12 mm
Lightning current carrying capability (10/350 μs)	100 kA ^{*)}
Short-circuit current (50 Hz) (1 s; ≤ 300 °C)	9.4 kA ^{*)}
Standard	EN 62561-1
Weight	460 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364082861
PU	1 pc(s)

^{*)} For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.