





UEBL L170 B11 B5.2 6.5 CU (377 027)



Figure without obligation

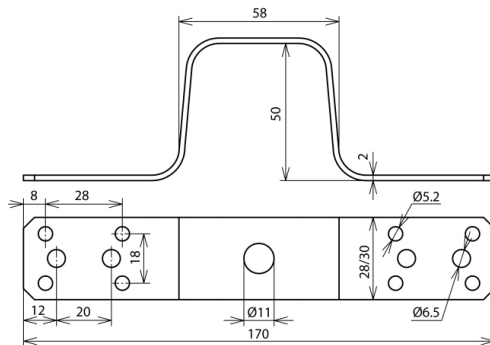

Arrangement:

| Type | UEBL L170 B11 B5.2 6.5 CU |
|---|---|
| Part No. | 377 027 |
| Material | Cu |
| Dimensions | 28 x 2 mm |
| Length | 170 mm |
| Fixing | [8x] Ø5.2 / [4x] Ø6.5 mm |
| Application note | according to DIN EN 62305-3 Supplement 1, materials ≥ 0.5mm thick shall be connected by 4 rivets Ø5mm, materials ≥ 2mm thick by 2 rivets Ø6mm, or materials ≥ 2mm thick by 2 tapping screws Ø6.3mm StSt |
| Middle hole | Ø11 mm |
| Fixing possibility | blind rivets or drilling screws |
| Lightning current carrying capability (10/350 µs) | 100 kA ^{*)} |
| Standard | EN 62561-1 |
| Weight | 112 g |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364034204 |
| PU | 50 pc(s) |

^{*)} For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Bridging brackets with middle hole may be combined with KS connectors (e. g. Part No. 301 019).