


PHG2 20 (766 720)

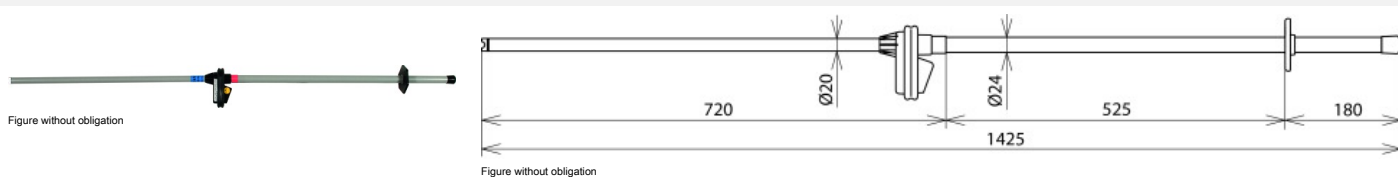

Category "S" for indoor switching stations

| Type | PHG2 20 |
|---|--|
| Part No. | 766 720 |
| Nominal voltage (U _N) | 20 kV |
| Type of voltage | a.c. |
| Frequency | 50 Hz |
| Total length (l _o) | 1425 mm |
| Insertion depth (l _i) | 720 mm |
| Standard | EN/IEC 61243-1 (DIN VDE 0682-411) |
| Temperature range | -25 °C ... +55 °C, climatic category N |
| Design | Complete |
| For use at | * |
| For | Indoor installations |
| Application | Switchgear installations |
| Type | Single-pole |
| Indication | Visual, three LEDs |
| Function | Passive voltage detector without batteries |
| Material (test electrode) | Cu/gal Sn |
| Material (test prod) | Glass-fibre reinforced polyester tube |
| Material (indicator) | Plastic |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| Weight | 1,7 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303370 |
| GTIN | 4013364094321 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.