


### DIDH 16 530 SB50.300 V2A (106 245)

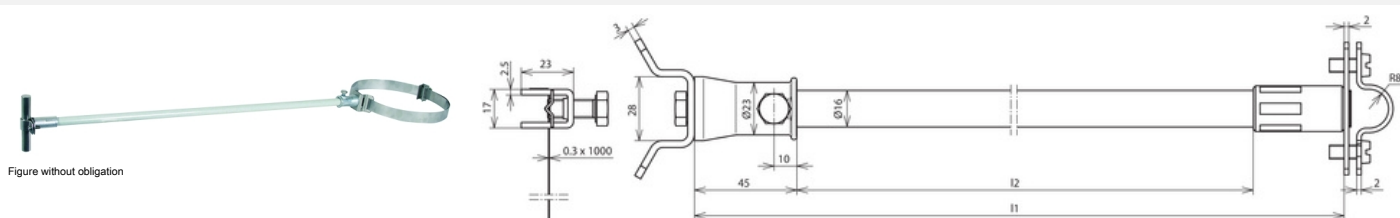

| Type  | DIDH 16 530 SB50.300 V2A              |
|---|---------------------------------------|
| Part No.                                      | 106 245                               |
| Conductor support Rd                          | 16 mm                                 |
| Material of conductor holder                  | StSt                                  |
| Length (l1)                                   | 530 mm                                |
| Insulating clearance (l2)                     | 445 mm                                |
| Clamping range of pipe                        | 50-300 mm                             |
| Diameter Ø of spacer                          | 16 mm                                 |
| Colour of spacer                              | light grey (RAL 7035) •               |
| Conductor routing                             | fixed                                 |
| Rod / conductor holder                        | 2-screw cleat                         |
| Material of spacer                            | GRP                                   |
| Material factor km                            | 0.7                                   |
| Permanent temperature range                   | -50 °C ... +100 °C                    |
| Material of fixing bush                       | ZDC                                   |
| Material of fixing element                    | StSt                                  |
| Type  | UV stabilised and weather resistant   |
| Dimension of strap (w x d)                    | 25 x 0.3 mm                           |
| Standard                                      | DIN IEC/TS 62561-8 (VDE V 0185-561-8) |
| Weight  | 561 g                                 |
| Customs tariff number (Comb. Nomenclature EU) | 85389099                              |
| GTIN  | 4013364100336                         |
| PU  | 1 pc(s)                               |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Verisons with other spacer bar lengths are available upon request.