



**BRS 27.89 AK1X10 2X6.8 GSG V2A (540 104)**

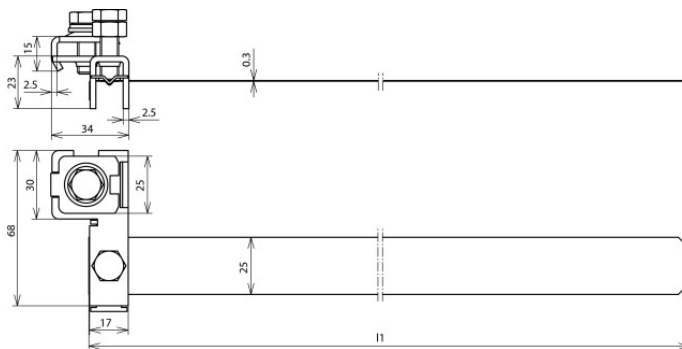


Figure without obligation

Pipe clamp for electrical contacting of pipes in explosion-hazardous areas zone 2/22. Pipe clamp is secured against self-loosening according to DIN/EN 62305-3 Supplement 2 (VDE 0185-305-3 Bbl 2).



Arrangement:

Type	BRS 27.89 AK1X10 2X6.8 GSG V2A
Part No.	540 104 ✓
Material	StSt
Clamping range pipe Ø	27-89 mm ( <sup>3</sup> / <sub>4</sub> -3")
Screw	⚙️ M8 x 20 mm
Material of screw	StSt
Dimensions of strap (l1 x w x d)	330 x 25 x 0.3 mm
Connection Rd	1 x 10 mm / 1-2 x 6-8 mm
Connection (solid / stranded)	4-50 mm <sup>2</sup>
Lightning current carrying capability (10/350 µs)	100 kA <sup>*)</sup>
Standard	EN 62561-1
Application note	For connection with a cable lug the clamping piece has to be removed
Tightening torque	≥ 15 Nm
Weight	127 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364239685
PU	10 pc(s)

<sup>\*)</sup> For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.