

## DB M MOD 150 (961 001)

- High discharge capacity due to powerful creepage discharge spark gap
- Easy replacement of protection modules without tools due to module locking system with module release button
- The plug-in protection module can be replaced without switching off the mains voltage and removing the vertical cover





Figure without obligation



Basic circuit diagram DB M MOD 150

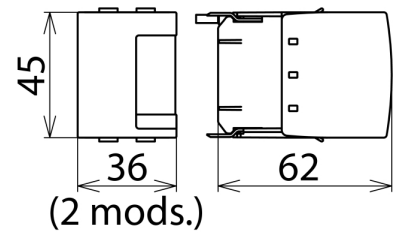

Dimension drawing DB M MOD 150

Spark-gap-based protection module

Type	DB M MOD 150
Part No.	961 001
Max. continuous operating voltage (a.c.) ( $U_c$ )	150 V
Lightning impulse current (10/350 $\mu$ s) ( $I_{imp}$ )	35 kA
Specific energy (W/R)	306.25 kJ/ohms
Follow current extinguishing capability (a.c.) ( $I_n$ )	35 kA <sub>rms</sub>
Follow current limitation / Selectivity	no tripping of a 32 A gG fuse up to 50 kA <sub>rms</sub> (prosp.)
Weight	173 g
Customs tariff number (Comb. Nomenclature EU)	85363090
GTIN	4013364118584
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.