




EWD MVK8.10 M10 L100 300 V4A (478 410)



Figure without obligation

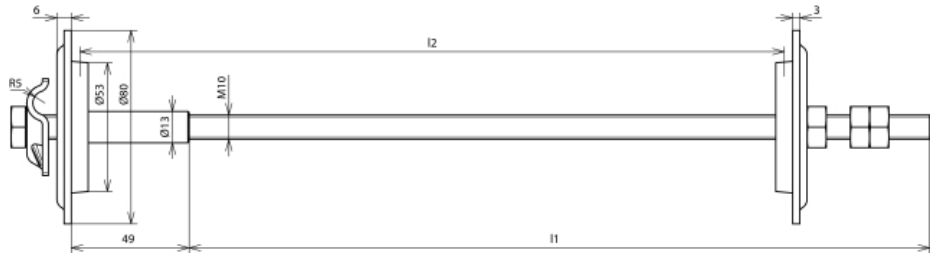

With MV clamp made of StSt (V4A) for round conductors 8–10 mm.

Water-pressure-tight wall bushing for leading earthing conductors / equipotential bonding conductors through brickwork or walls; with M10 threaded rod made of StSt.

For subsequent installation through borehole (Ø14 mm) or through spacer in the formwork.

Test for water pressure-tightness up to 1 bar features an installation depth of 10 m in stagnant water.



Arrangement:

| Type | EWD MVK8.10 M10 L100 300 V4A |
|---|------------------------------|
| Part No. | 478 410 |
| Length of bushing (l2) | 100-300 mm |
| Length of threaded rod (l1) | 308 mm |
| Sealings | Neoprene |
| Sealing disc Ø | 80 mm |
| Material of disc | StSt (V4A) |
| Material No. | 1.4571 / 1.4404 / 1.4401 |
| ASTM / AISI: | 316Ti / 316L / 316 |
| Material of threaded rod / nut | StSt |
| Short-circuit current (a.c. 50 Hz / d.c.) (1 s; ≤ 300 °C) | 2.7 kA |
| Standard | EN 62561-1 |
| Weight | 580 g |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364136335 |
| PU | 5 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.