


## PCE data sheet

article#	<b>043-9</b>
article description	<b>CEE-plug 125A 3p 9h IP67 POWER TWIST</b>
description long	CEE-plug 125A 3p 9h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 3 (2P+PE) clock-position: 9h rated voltage/frequency: 380-415V~ / 50+60Hz contacts: brass nickel plated, with pilot pin connection technology: frame terminals with screws IP protection class: IP66/IP67
GTIN (EAN)	9003399784842
country of origin	AT
customs number	85366990
net weight	0.956 kg
packaging quantity	2
minimum order quantity	2

ETIM 8.0	EC000140
IEC-amperage	125 A
Number of poles	3
Voltage according to EN 60309-2	380-415 V (50+60 Hz) red
Clock hour position	9 h
Identification colour	Red
RAL-number	7046
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Cable entry	Gland nut
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

a	270 mm
b	131 mm
K (cable Ø)	22,5-50 mm
SW	81 mm
wire flexible	16-50 mm <sup>2</sup>
contact screws	450 Ncm
strain relief	1500 Ncm
dismantling length	100 mm
stripping length	24-27 mm

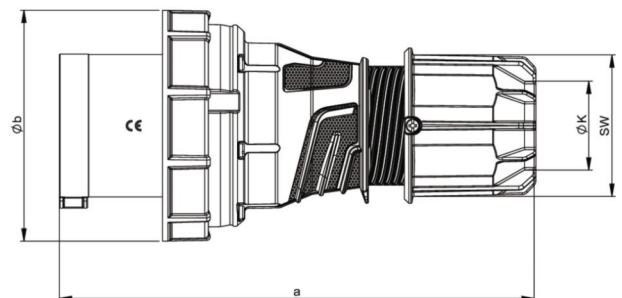

<https://www.pcelectric.at/shop/en/?func=detail&artnr=043-9>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)