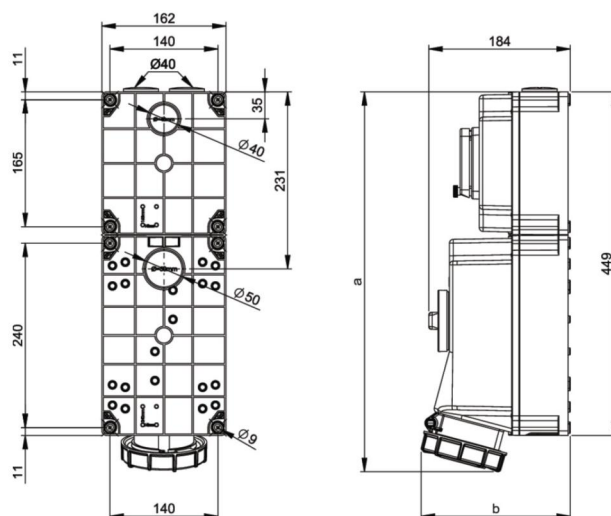


**PCE data sheet**

article#	<b>76352-9</b>
article description	<b>CEE-switched interlocked socket DIN 63A 5p 9h IP66/IP67</b>
description long	CEE-switched interlocked socket DIN 63A 5p 9h IP66/IP67 housing material: PC/ABS rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 9h rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: screw terminals wall mounting, mechanical interlock, hinged window (6 modules), DIN-rail switch: ON/OFF PCE-Merz ML2-063; EN 60947-3; AC22A, 10kA cable entry: top, bottom or rear (incl. threaded blind cap) IP protection class: IP66/IP67
GTIN (EAN)	9003399615689
country of origin	AT
customs number	85366990
net weight	3.100 kg
packaging quantity	1

ETIM 7.0	EC001324
IEC-amperage	63 A
Number of poles	5
Voltage acc. EN 60309-2	200-250 V (50+60 Hz) blue
Clock hour position	9 h
Identification colour	Blue
Degree of protection (IP)	IP67
Switch	Mechanical locking
Empty locations on mounting rail	6
Material housing	Plastic
Model	Base unit and cover
Protection	None
Contact material	CuZn
Surface finish contacts	Nickel-plated

wire flexible	6-16 mm <sup>2</sup>
wire solid	6-25 mm <sup>2</sup>


[www.manufacturer-safety.info](http://www.manufacturer-safety.info)