

RINDO MCOB SE

Naświetlacz LED MCOB z czujnikiem ruchu / LED MCOB floodlight with a motion detector



RINDO MCOB-10-GM SE




RINDO MCOB-30-GM SE




RINDO MCOB-50-GM SE

RINDO MCOB-10-GM SE - 145
 RINDO MCOB-30-GM SE - 220
 RINDO MCOB-50-GM SE - 295

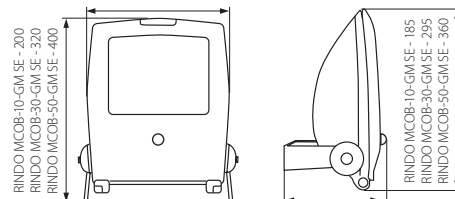

RINDO MCOB-10-GM SE - 95
 RINDO MCOB-30-GM SE - 147
 RINDO MCOB-50-GM SE - 175

RINDO MCOB-10-GM SE - 68
 RINDO MCOB-30-GM SE - 100
 RINDO MCOB-50-GM SE - 120



- ▶ obudowa: stop aluminium / szyba ochronna: szkło hartowane / wysięgnik: metal żelazny
- ▶ casing: aluminum alloy / protective pane: tempered glass / extension arm: ferrous metal

	Kanlux						
NEW	RINDO MCOB-10-GM SE	18483	grafitowy / graphite/gun metal	10	500	1/-/16	860
NEW	RINDO MCOB-30-GM SE	18484	grafitowy / graphite/gun metal	30	1500	1/-/6	2350
NEW	RINDO MCOB-50-GM SE	18485	grafitowy / graphite/gun metal	50	2500	1/-/2	4050

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

MCOB - Multi Chip on Board / wertykalny kąt wykrywania ruchu 90° / horyzontalny kąt wykrywania ruchu 360° / zakres wykrywania ruchu do 8 m / możliwość regulowania czasu świecenia oprawy w zakresie od 5 s do 8 min / możliwość przełączenia oprawy w tryb stałego świecenia z pominięciem czujnika ruchu / możliwość ustawienia poziomu natężenia oświetlenia otoczenia, przy którym urządzenie pracuje

MCOB - Multi Chip on Board / vertical movement detection angle 90° / horizontal movement detection angle 360° / movement detection range up to 8 m / possible 5 s to 8 min range of fitting lighting time control / the possibility to switch the fixture to the continuous lighting mode, bypassing the movement sensor / setting ambient illumination level in which the equipment operates