

KS6 C/1

Wyłącznik nadmiarowo-prądowy / Miniature circuit breaker



KS6 C4/1



KS6 C6/1



KS6 C10/1



KS6 C16/1



KS6 C20/1





KS6 C25/1



KS6 C32/1

- ▶ obudowa: tworzywo sztuczne
- ▶ casing: plastic

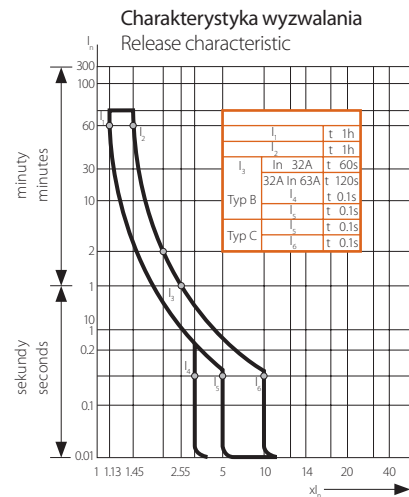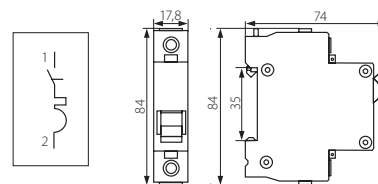

Kanlux			I_n
KS6 C4/1	04432	brązowy / brown	4A
KS6 C6/1	04433	zielony / green	6A
KS6 C10/1	04434	czerwony / red	10A
KS6 C16/1	04435	szary / grey	16A
KS6 C20/1	04436	niebieski / blue	20A
KS6 C25/1	04437	żółty / yellow	25A
KS6 C32/1	04438	purpurowy / purple	32A

U_n 230/400V~	50Hz	I_{cn} 6000A				∇ [mm ²] 1÷25			 -5÷40			 -12/120	 104 [g]		
--------------------	------	-------------------	--	--	--	-------------------------------------	--	--	-----------	--	--	-------------	-------------	--	--

służy do ochrony przed skutkami zwarc i przeciążeń instalacji, w których zastosowano urządzenia elektroenergetyczne o dużych prądach rozruchowych / zgodność z normami EN60898/IEC60898 for protection against effects of short-circuits and overloads in systems where high starting-current power equipment is applied / compliance with EN60898/IEC60898 standards