



lm
W 95

IP65

IK08



Oprawa pyłoszczelna LED
Dustproof LED light fixture
Пыленепроницаемый светильник LED

MAH LED



MAH-LED-60-NW/PC



220-240V~
50/60Hz

LED SMD

56

5300 (lm)

30000 (h)

4000 (IK) IES ENEC
6x MacAdam

≥15000



2x (0,5-2,5) [mm²]




-20+40 (°C)



EAC

CE

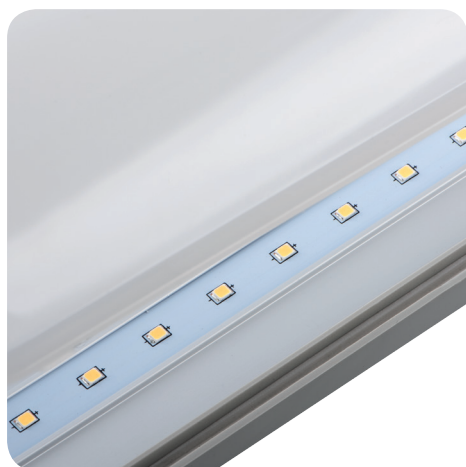

Kanlux



MAH-LED-60-NW/PC

22602



PL

szary
obudowa, klosz: poliwęglan (PC)

GB

grey
casing, diffuser: polycarbonate (PC)

RUS

серый
корпус, плафон: поликарбонат (PC)