




LED SMD

Оправа typu downlight LED
LED downlight fixture
Светильник типа downlight LED

ROUND A N LED 6W



ROUND A LED...W

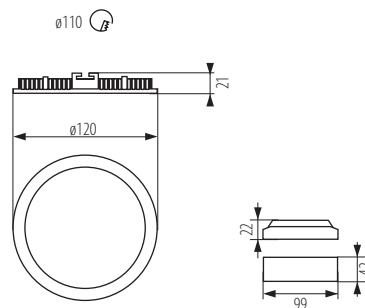

ROUND A LED...SR



ROUND A LED...SN

220-240V~
50/60Hz

[°]
110



[h]
20000 h

≥15000

2 x 0,75mm²
5 cm

IP
44/20



ERC

CE

Kanlux



[W]



[lm]

			[W]	Tc [K]	[lm]
ROUND A N LED6W-WW-SN	22503	nikiel satynowy satin nickel / Никкил сатиновский	6	3000	380
ROUND A N LED6W-WW-SR	25832	srebrny / silver / серебряный	6	3000	380
ROUND A N LED6W-WW-W	25833	biały / white / белый	6	3000	380
ROUND A N LED6W-NW-SN	22502	nikiel satynowy satin nickel / Никкил сатиновский	6	4000	400
ROUND A N LED6W-NW-SR	25830	srebrny / silver / серебряный	6	4000	400
ROUND A N LED6W-NW-W	25831	biały / white / белый	6	4000	400



PL

obudowa: stop aluminium / klosz: tworzywo sztuczne

zasilacz w komplecie

GB

casing: aluminium alloy / diffuser: plastic

power supply unit included

RUS

корпус: листовая сталь / плафон: пластик

источник питания в комплекте