




LED SMD

Оправа typu downlight LED  
LED downlight fixture  
Светильник типа downlight LED

# ROUNDA N LED 12W



ROUNDA LED...W

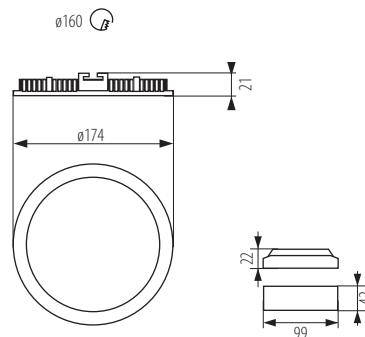

ROUNDA LED...SR



ROUNDA LED...SN

220-240V~  
50/60Hz

[°]  
110



[h]  
20000 h

≥15000

2 x 0,75mm<sup>2</sup>  
5 cm

IP  
44/20



ERC

CE

**Kanlux**



[W]

Tc [K]  
ELIPSE  
≤ 6x MaxCandam

[lm]

ROUNDA N LED12W-WW-SN	22505	nikiel satynowy satin nickel / сатиновый никель	12	3000	750
ROUNDA N LED12W-WW-SR	25836	srebrny / silver / серебряный	12	3000	750
ROUNDA N LED12W-WW-W	25837	biały / white / белый	12	3000	750
ROUNDA N LED12W-NW-SN	22504	nikiel satynowy satin nickel / сатиновый никель	12	4000	800
ROUNDA N LED12W-NW-SR	25834	srebrny / silver / серебряный	12	4000	800
ROUNDA N LED12W-NW-W	25835	biały / white / белый	12	4000	800



PL

obudowa: stop aluminium / klosz: tworzywo sztuczne

zasilacz w komplecie

GB

casing: aluminium alloy / diffuser: plastic

power supply unit included

RUS

корпус: листовая сталь / плафон: пластик

источник питания в комплекте