


## MyHOME® Play

### 4-scenario radio controls

Cat. No(s): 0 672 66 - 7 520 83





0 672 66

#### 1. USE


Each button on the unit sends a command to one or more light or blind radio receiver switches thus activating scenarios that can combine several functions.

Can be combined with other wiring accessory products in a multi-gang unit.  
For fixing directly on the wall without a flush-mounting box.  
Remote control format.

#### 2. RANGE

	Description	Cat. No.
	Céliane control supplied with support To be fitted with a Céliane cover plate and a Céliane plate	0 672 66
	Valena control supplied with support To be fitted with a Valena cover plate and a Valena plate	7 520 83

#### 3. OVERALL DIMENSIONS (mm)

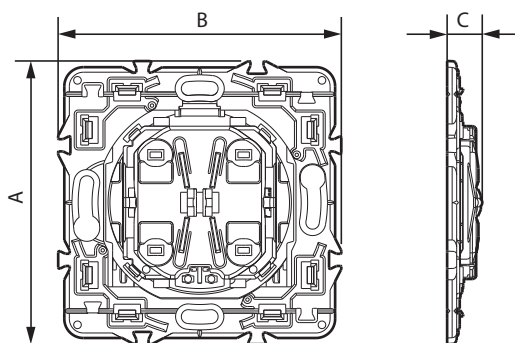

Cat. Nos.	A	B	C
0 672 66	74	74	9
7 520 83	75	75	9

#### 4. CONNECTION

No connections (battery powered).

#### 5. TECHNICAL CHARACTERISTICS

##### ■ 5.1 Mechanical characteristics

Impact test: IK 04

Penetration by solid bodies/liquid: - IP 40, product assembled  
- IP 20, without rocker

##### ■ 5.2 Material characteristics

- Halogen-free  
- PC reinforced with 10% glass

Self-extinguishing:

+ 850° C/30 s for insulating parts holding live parts in place  
+ 650° C/30 s for other parts made of insulating materials

##### ■ 5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)

2.4 GHz Radiofrequency band (16 channels) - Byte rate: 250 KB/s

Self healing MESH network with high security level (AES128) according to IEEE 802.15.4 (LR-WPAN) standard.

##### ■ 5.4 Climatic characteristics

Storage and operating temperatures: + 5° C to + 45° C

#### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover or trichloroethylene.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

#### 7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.

Refer to e-catalogue.