

Circularity Profile

Lexium 62 Range : 6A to 45A





DANGER


HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power from all equipment including connected devices prior to removing any covers or doors, or installing or removing any accessories, hardware, cables, or wires except under the specific conditions specified in the appropriate hardware guide for this equipment.
- Wait 5 minutes to allow the internal capacitors to discharge.
- Always use a properly rated voltage sensing device to confirm the power is off where and when indicated.

Failure to follow these instructions will result in death or serious injury.



End of Life Instructions

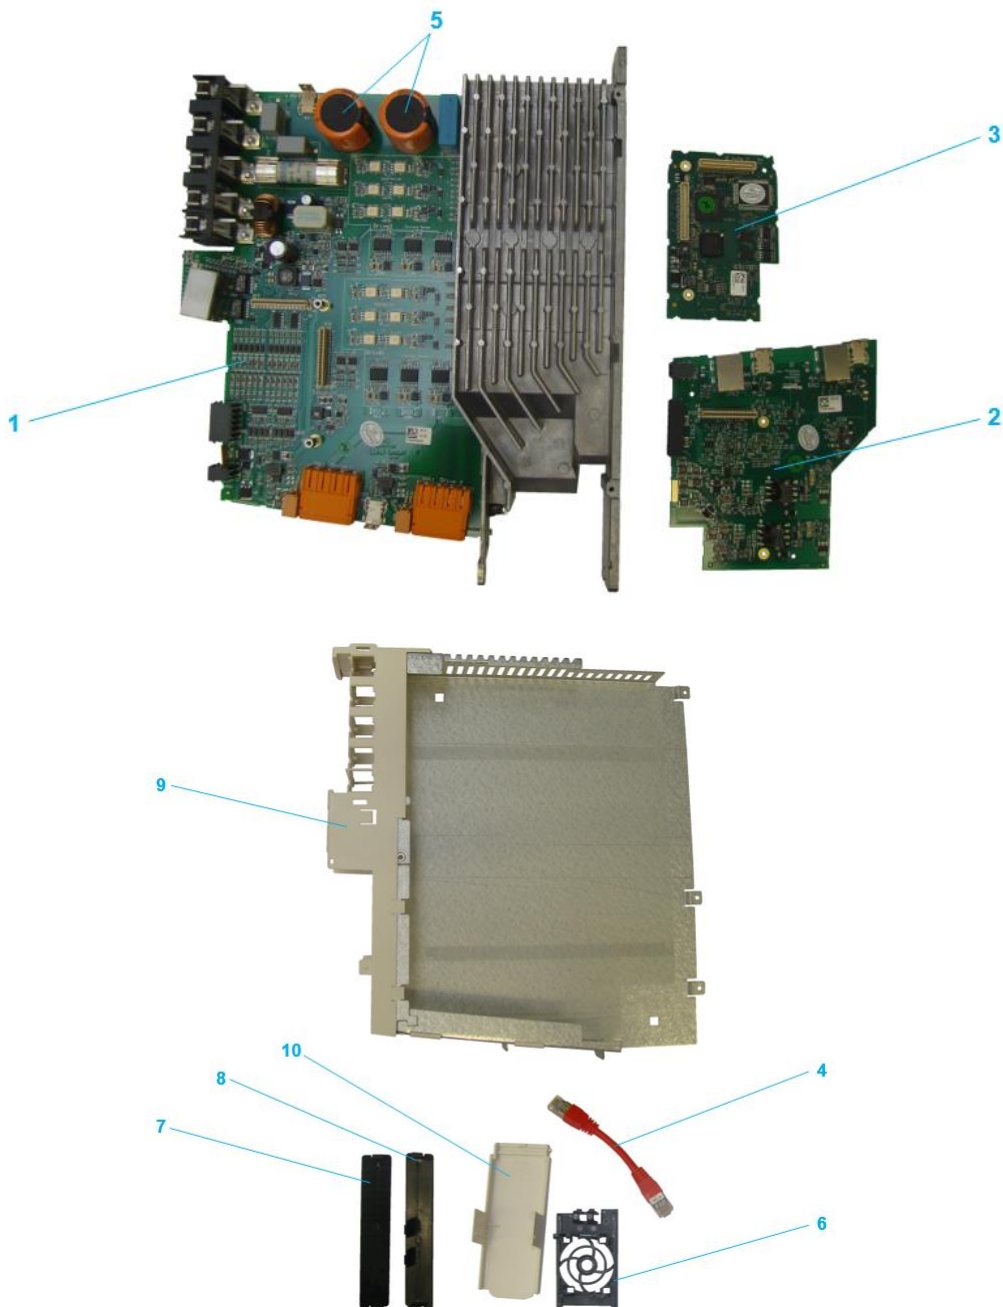

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Power) > 10cm ²	1663,2	
To be depolluted	2	Electronic Board (Power) > 10cm ²	87,8	
To be depolluted	3	Electronic Board (Power) > 10cm ²	36,55	
To be depolluted	4	Cable (low current)	11,94	
To be depolluted	5	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	69,94	
To be dismantled	6	Fan Cover	8,39	
To be dismantled	7	Shock Protector left	9,32	
To be dismantled	8	Shock Protector right	9,78	
To be dismantled	9	Front panel	51,48	
To be dismantled	10	Front flap	14,45	



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The servo converters - single and double drives, provide the necessary phase currents for the position control of the connected servo motors. According to the different requirements in relation to the individual servo axes of the application, the single- and double drives are available in different current classes.
Product reference	LXM62DD27D21000
Total representative product mass	3254,4 g
Representative product dimensions	310mm x 44.5mm, 270mm
Date of information release	08/2020



Additional information

Legal information	The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
Recyclability potential	71% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVEOLI1406012_V2

© 2020 - Schneider Electric – All rights reserved

08/2020