


DPG LSA 220 P (906 103)

- Lightning current carrying earthing system for arresters and shield connection
- Integrated mounting frame for LSA blocks with terminal spacing of 30 mm
- Extra space for uninterfered cable routing and surge arresters



Figure without obligation

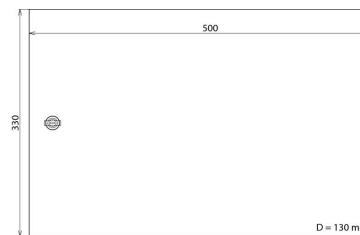

Dimension drawing DPG LSA 220 P

DPG LSA is a completely premounted enclosure system with LSA mounting frame and allows optimised use of arresters and shield connection systems (constant force spring).

Type	DPG LSA 220 P
Part No.	906 103
Carrying capacity of connection elements D1 Total lightning impulse current (10/350 μ s) (I_{imp})	50 kA
LSA mounting frame for	2x 11 blocks 2/10
Terminal spacing of mounting frame	30 mm
Wire guides	3 pc(s).
Cable entries	top / bottom
Cable rail	top / bottom
Lock	yes
For mounting on	walls
Degree of protection	IP 40
Earthing via	earthing block
Dimensions (W x H x D)	330 x 500 x 130 mm
Enclosure material	sheet steel
Colour	RAL 9016
Weight	7,65 kg
Customs tariff number (Comb. Nomenclature EU)	85381000
GTIN	4013364106628
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.