


PCE data sheet

article#	245-7
article description	CEE-connector 125A 5p 7h IP67 POWER TWIST
description long	CEE-connector 125A 5p 7h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 5 (3P+N+PE) clock-position: 7h rated voltage/frequency: 277/480V~ - 288/500V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws IP protection class: IP66/IP67
GTIN (EAN)	9003399047190
country of origin	AT
customs number	85366990
net weight	1.266 kg
packaging quantity	2
minimum order quantity	2

ETIM 8.0	EC001320
IEC-amperage	125 A
Number of poles	5
Voltage according to EN 60309-2	500 V (50+60 Hz) black
Clock hour position	7 h
Identification colour	Black
RAL-number	7046
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Straight
Cable entry	Gland nut
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated

a	287 mm
b	124 mm
K (cable Ø)	22,5-50 mm
SW	81 mm
wire flexible	16-50 mm ²
contact screws	450 Ncm
strain relief	1500 Ncm
dismantling length	100 mm
stripping length	24-27 mm

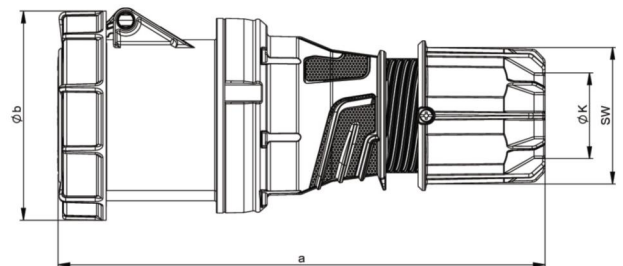

<https://www.pcelectric.at/shop/en/?func=detail&artnr=245-7>



www.manufacturer-safety.info